



◀ THOMPSON MODEL 1928A1

Date 1935
Origin US
Barrel 30.5cm (12in)
Caliber .45in

This model was fitted with a Cutts Compensator that allowed combustion gases generated during firing to be vented at the barrel's muzzle, thereby reducing the weapon's tendency, common in submachine-guns, to rise in fully automatic mode. This gun is a simplified version of earlier Thompson models and lacks cooling ribs and a forward pistol grip.



▲ THOMPSON M1


Date 1941-42
Origin US
Barrel 10in (25.4cm)
Caliber .45in

To speed up production during wartime and reduce costs, the Thompson was further simplified by losing the compensator, foresight, and cooling ribs to produce the M1. This gun featured a simple rear sight.

▼ THOMPSON M1A1

Date 1942-45
Origin US
Barrel 10in (25.4cm)
Caliber .45in

The M1A1 was a slight variation of the Thompson M1 (right). Additions included a foresight and a shrouded rear sight. The M1A1 saw wide service in virtually every Allied army and theater of war.

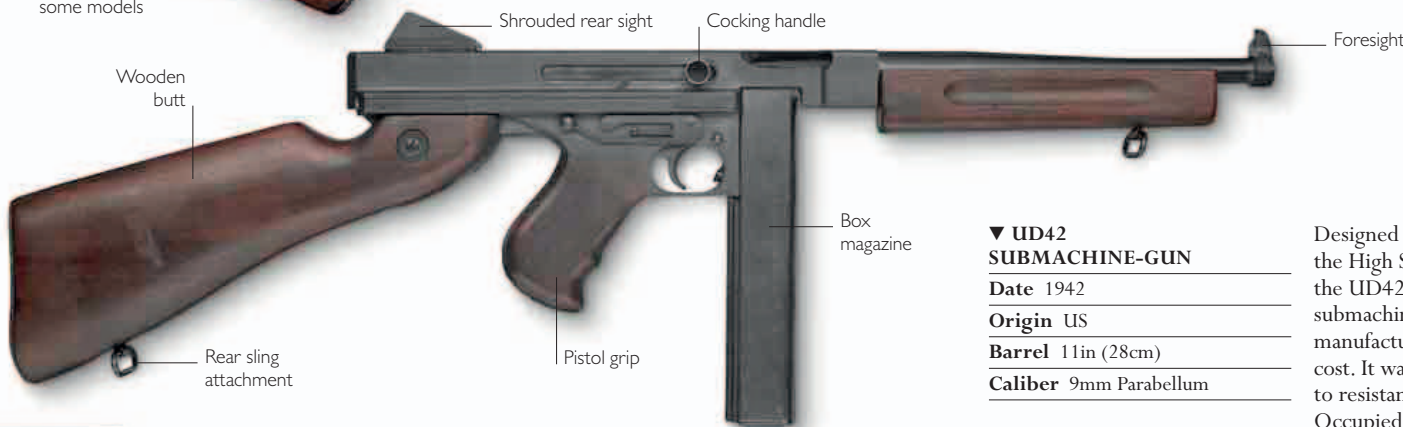

▼ UD42 SUBMACHINE-GUN

Date 1942
Origin US
Barrel 11in (28cm)
Caliber 9mm Parabellum

Designed by Gus Swebelius of the High Standard Arms Company, the UD42 was an extremely simple submachine-gun that could be manufactured at a relatively low cost. It was distributed primarily to resistance forces operating in Occupied Europe.



FULL VIEW