



▲ MUSKET MODEL 1795, TYPE II

Date	1799
Origin	US
Barrel	46¾in (119cm)
Caliber	.69in (17.5mm)

This is a modification of the Type I musket. Examples of the Type I and II muskets were carried by members of the Lewis and Clark Expedition of 1804–06. They were also in general issue to US troops during the War of 1812, between the US and Britain. Built originally at Springfield Armory, Massachusetts, this musket was later also produced at Harpers Ferry (in modern-day West Virginia).

▲ MUSKET MODEL 1795, TYPE I

Date	1795
Origin	US
Barrel	49in (124.5cm)
Caliber	.69in (17.5mm)


After the end of the Revolutionary War, the US adopted its own pattern of musket, based very closely on the French Charleville Model of 1763/66. This is the first type of the new pattern of US musket produced at Springfield Armory (see pp.62–63). During its service life, this musket underwent several internal mechanical modifications.



▼ INDIA-PATTERN MUSKET

Date	1797 onward
Origin	UK
Barrel	39in (99cm)
Caliber	.75in (19mm)

Before the outbreak of war with France in 1793, Britain had been planning a new pattern of musket, but this was not yet in production. To overcome a shortage of weapons, Britain bought British East India Company muskets as an emergency measure. These saw service throughout the Napoleonic Wars (1803–15).

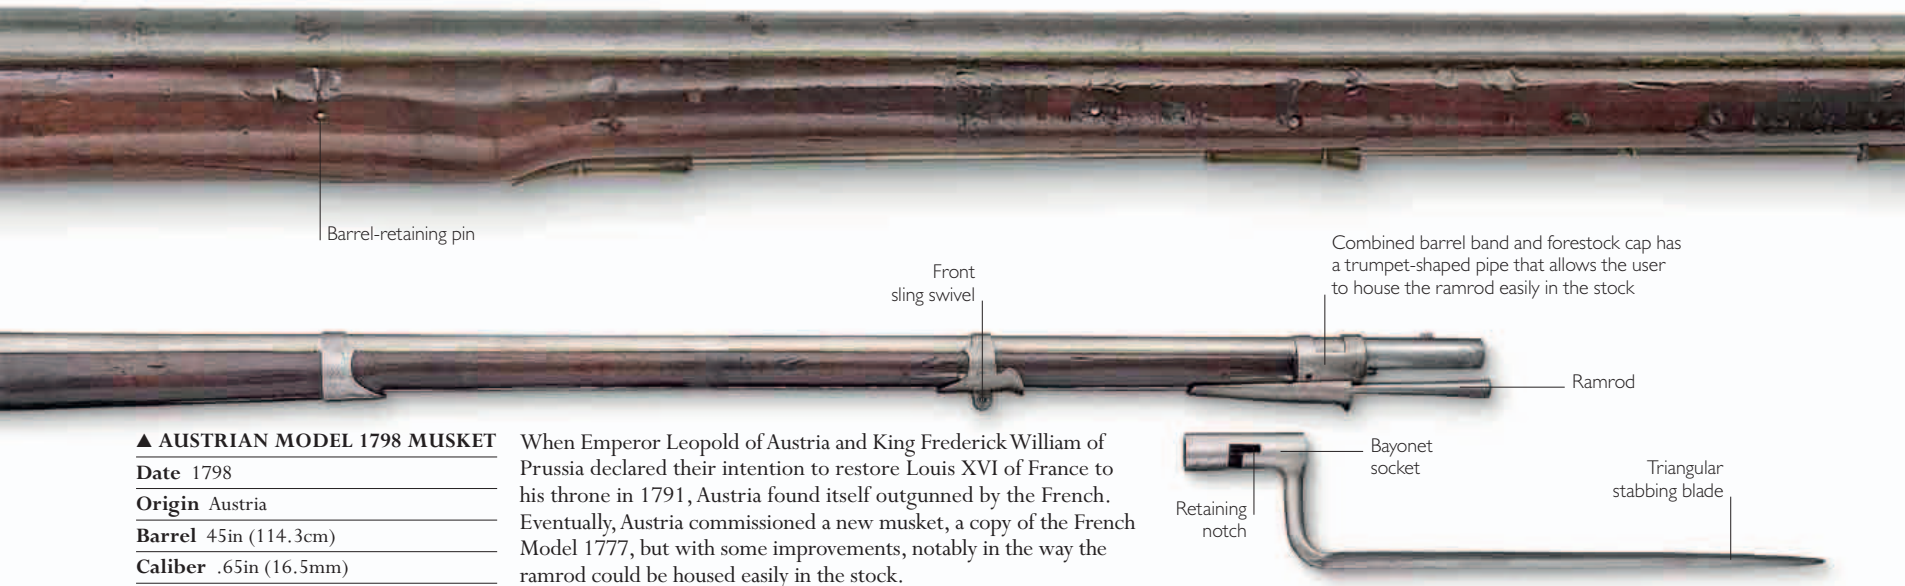

▲ AUSTRIAN MODEL 1798 MUSKET

Date	1798
Origin	Austria
Barrel	45in (114.3cm)
Caliber	.65in (16.5mm)

When Emperor Leopold of Austria and King Frederick William of Prussia declared their intention to restore Louis XVI of France to his throne in 1791, Austria found itself outgunned by the French. Eventually, Austria commissioned a new musket, a copy of the French Model 1777, but with some improvements, notably in the way the ramrod could be housed easily in the stock.

◀ SPANISH MUSKET

Date	c.1800
Origin	Spain
Barrel	43½in (110.5cm)
Caliber	.72in (18.3mm)

This musket resembles French patterns, but it is one of very few muskets of the time that has a flash guard. The guard is a metal (in this case, brass) disk fixed to the end of the pan. When a soldier fired a musket, a jet of hot gas from the exploding main charge shot out sideways from the touchhole. The flash guard helped to deflect this jet of gas upward, preventing it from hitting a neighboring soldier in the face.

