


Cut Your Losses and Shrink Your HeatSink

Reduce Power Dissipation in Inverters by 60% in Motor Applications up to 2.5kW

Part Number	Package Type	BVCES (V)	IC @ 25°C (A)	IC @ 100°C (A)	VCE(ON) @ 175°C Typical (V)	ETS @ 175°C IC @ 100°C Typical (μJ)	TSC (μS)	POUT range (kW)
IRGB4045DPbF	TO-220	600	12.0	6.0	2 @ 6A	330	5.0	0.75
IRGB4056DPbF	TO-220	600	24.0	12.0	2 @ 12A	540	5.0	1.5
IRGB4062DPbF	TO-220	600	48.0	24.0	2 @ 24A	1260	5.0	3.0
IRGP4063DPbF	TO-247	600	96.0	48.0	2 @ 48A	3210	5.0	6.0

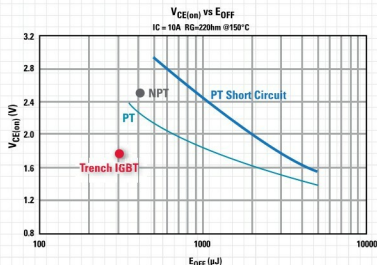

IR's family of 600V IGBTs deliver up to 60% higher RMS current compared to previous devices. The reduced power dissipation can result in a 50% heatsink reduction.

Features

- Highly efficient depletion-stop trench IGBTs in range of configurations including discrete and integrated modules
- Lower collector-to-emitter saturation voltage and VCE(ON) than punch-through (PT) and non-punch-through (NPT) IGBTs
- Operates up to 175°C maximum junction temperature

www.irf.com

For any enquiry, please contact us using our "Customer Relationship Management (CRM) System" and check the box below on www.irf-asia.com/contact or www.irf.com.cn/contact:

1) Register for China News (in Simplified Chinese language); 2) Contact IR Sales Team; 3) Contact Asia Customer Service Center or 4) Request for IR Literature

International
IR Rectifier
THE POWER MANAGEMENT LEADER