

Easy. Powerful.


The R&S® RTE:

Simply more scope.

R&S® RTE main specifications

Bandwidth	200 MHz, 350 MHz, 500 MHz, 1 GHz (upgradable)
Analog channels	2/4 channels
Sample rate	5 Gsample/s per channel
Memory depth	10 Msample per channel (optional 50 Msample)
Acquisition rate	> 1,000,000 waveforms/s
ENOB (ADC)	> 7
MSO (R&S® RTE-B1 option)	16 digital channels 5 Gsample/s and 100 Msample per channel
Display	10.4", color, touch; 1024 × 768 pixel; multiple grids (R&S SmartGrid)

New Addition to
R&S
Scope family

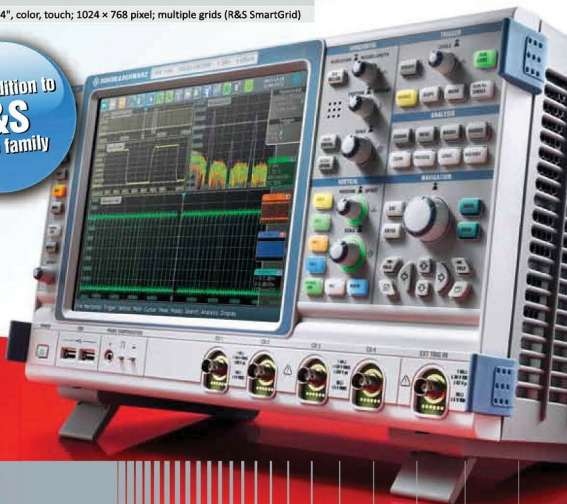

 **ROHDE & SCHWARZ**

A-27 Mohan Co-Operative Industrial Estate, Mathura Road, New Delhi-110044, Phone: +91-11-42535400, Fax: +91-11-42535433
E-Mail: sales.rsindia@rohde-schwarz.com, Website: www.rohde-schwarz.co.in