


VTAC HSD

VPC's VTAC **High Speed Data (HSD)** connectors allow engineers in multiple industries to test devices that communicate at greater speeds and require higher data rates. The VTAC HSD insert features a data transfer rate of **12.5+ Gbps** per differential pair. Each VTAC HSD 50 μ " gold-plated, self-aligning contact has been tested and verified to 10,000 cycles without signal degradation.

WWW.VPC.COM/HIGHSPEED

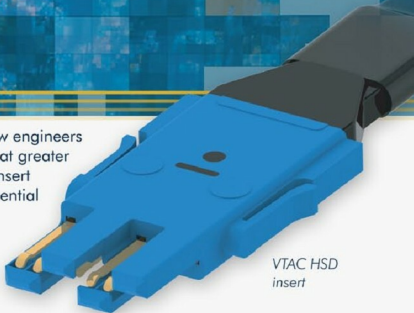

VTAC HSD
insert



90 Series



i2 Micro iCon

- » **Modular:** VTAC contacts work in both the iSeries and 90 Series connector families
- » **Scalable:** Customize between 8-272 individual contacts
- » **Reconfigurable:** Arrange VTAC inserts in desired location and rearrange to fit requirement needs
- » **Compatible:** With multiple HSD standards USB 3.0, Serial ATA, HDMI, DVI & DVI-I, RJ45 Gigabit Ethernet, QSFP, Twinax and Infiniband (more standards available)



AEROSPACE • MEDICAL • DEFENSE • CONSUMER ELECTRONICS • AUTOMOTIVE • TELECOMMUNICATIONS • ENERGY • INDUSTRIAL AUTOMATION