

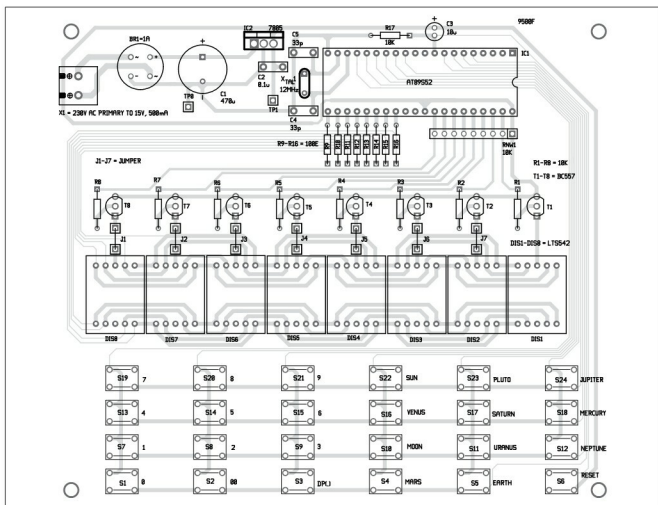


Fig. 4: Component layout for the PCB

into the microcontroller using a suitable programmer. On reset/power-on, the microcontroller executes the main function.

Construction and testing

An actual-size, single-side PCB for the

celestial weigh calculator is shown in Fig. 3 and its component layout in Fig. 4. Assemble the circuit on PCB to save time and minimize assembly errors. Carefully assemble the components and double-check for any overlooked error.

To test the circuit for proper functioning, verify correct 5V supply for the circuit at TP1 with respect to TP0. ●

The author works in the department of Physics, Hemchandracharya North Gujarat University, Patan, Gujarat

Read more stories on solar at
www.electronicb2b.com

**TOP
SOLAR STORIES**

- The latest in solar batteries
- There is an opportunity in over supply of PV modules
- The latest in solar panels
- Solar energy for your home
- The latest in solar grid tie inverters
- Which solar cell technology is the best?
- Crystalline PV technology is here to stay

**ELECTRONICS
B2B**
INDUSTRY IS AT A

CLICK OF A BUTTON

Log on to www.electronicb2b.com and be in touch with the Electronics B2B Fraternity 24x7