


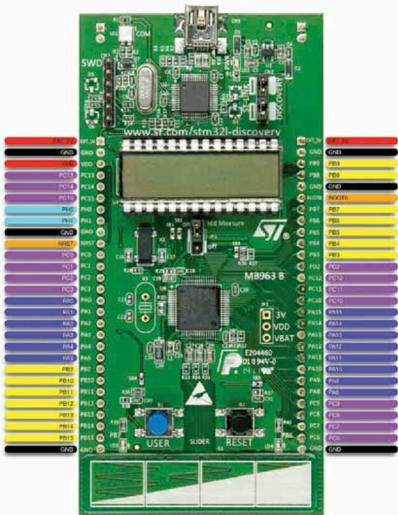

STMicroelectronics' STM32L Discovery board

The smaller Arduino boards are part of the series of Arduinos that are mountable on a breadboard. The smallest is the Arduino Mini Light, which is based on ATmega168 running at 16 MHz. Then comes the Arduino Pro Mini, which is available with both 8MHz and 16MHz clock speeds. Lower clock speed allows this version to run on 3.3V instead of 5V. All the Arduino Mini series boards have 512 kB of EEPROM and 1 kB of SRAM.

Next up is the Arduino Nano, which can be directly mounted on a breadboard. This board runs on the ATmega328 microcontroller and has a whole kilobyte of EEPROM and twice as much SRAM. Flash memory is 32 kB. In addition, the Nano version has the USB to serial chip and connector onboard.

The mainstream Arduino boards consist of the Arduino Mega and the highly popular Arduino Duemilanove. The Arduino Mega runs on the AT-mega1280 microcontroller and offers a lot more digital and analogue pins. A 4Kb EEPROM, 8Kb SRAM and 128 Kb of flash memory make this Arduino capable of handling bigger program sizes. It was voted as the second most popular developer board by the EFY Electronics Design Community on Facebook.

All Arduino boards are available from Kits'n'Spares and [element14](http://element14.com).

TI's BeagleBoard

The BeagleBoard is yet another fanless, Open Source hardware single-board computer. It's produced by Texas Instruments (TI) and Digi-Key.

SHAVISON™

Peripherals for Industrial Automation

SMPS mark on selected models



Features	● Built In Transient protector & EMI Filter ● Protection against Short Circuit, O/L & P/O ● Low ripple & noise ● Power OK indication ● Low cost ● High reliability ● Compact
IP Voltages	110V AC/DC, 230V AC/DC, 24V AC/DC, 48V AC/DC
OP Voltages	9V, 12V, 15V, 24V, 48V DC
OP Currents	1A, 1.5A, 2A, 2.5, 3A, 4A, 5A, 8A, 10A, 15A, 20A DC
Efficiency	70-75%
Overload Protection	105% - 120% of rated load
Line & Load Regulation	Better than 0.5%
OP Voltage Adjustment	±1-10% of nominal output voltage
Operating Ambient Temperature	0 - 50°C, 95% RH
Storage Ambient Temperature	-20°C to 85°C
Mounting	35 mm DIN rail

Also Available

- SSR Interface Modules



- Opto Interface Modules

- FRC/ D-SUB connector



•Diode/ Resistor Modules

- Power Distribution Modules



- **Redundancy Modules**

- Analog Signal Converters



- **Dedicated Controllers**

- Relay Interface Modules

SHAVISON ELECTRONICS PVT. LTD.

Unit No. G-5, B Wing, Udyog Bhavan No. 2, Plot K-3,
Anand Nagar MIDC, Ambarnath (E) 421 506, MH, India.
TeleFax: +91-251-2620417/ 2620427 Cell: +91 98 203 62980
Email: shavison@shavison.com **www.shavison.com**

Chhembad: Integrated - 09825430015 **Ankleshwar** / **Bharuch**
Ami - 0987963045 **Chemal** - Shree Krishna Enterprises
09360970781 **Coimbatore**: Suriya - 09843356058 **Dahli**
Powertech - 09212266995 **Durg (CG)** : Aditya - 09827111400
Karnal: Powertech - 09416473781 **Kohapur** : Kedar
09850401672 **Mumbai**: Lohar Chawli - A.K. Harital - 09321085554
Maheswari - 09821022778 **Goregaon** : Able - 09821322543
Mulund: Yogesh - 09823251679 **Andheri**: Kalpesh
092321500 **Vapi** : Milennium - 09374899371 **Silvasa** :
Vapi - 09824700675 **Nasik**: Nasik - 0942221456 **Pune**:
PMP - 09371038310 **Pune** Ind Distributors Pvt. Ltd.
08007492801 **Thane** : VE Electricals & Tools - 09810464729 /
Vasal: Piaschem - 09371049485