

over ADB. This helps in faster rooting than with other methods.

Theoretically, you don't need a screen, mouse or a keyboard to operate CASUAL. If it is deployed correctly, you can simply connect an Android smartphone with a known exploit to the system running CASUAL. The exploits will take place

M3 architecture running at 84 MHz. It also includes USB 2.0 interface running at 480 Mbps, support for Android ADK 2012 protocol, 12 analogue inputs, 12 PWM channels and two PC buses.

The analogue inputs come with a 12-bit resolution and high speed that can handle audio applications and signal processing projects previously not

Coming soon: Java Virtual Machine for Raspberry Pi

Oracle is working on a Java Virtual Machine (JVM) for the popular Raspberry Pi computer. "It is based on creating a version that uses the hardware floating-point capabilities of the bare board computer," according to a report.

According to Oracle's technology evangelist Simon Ritter, the company plans to bring it to the market in the near future. He was speaking at the Java One conference in San Francisco.

The \$25 Linux-based computer exclusively built for educating students on coding has been recently upgraded to 512 MB of RAM from 256 MB with no increase to the price tag.

"The move follows suggestions for a more expensive version of Pi with more RAM for those who want to use the credit-sized computer for general computing purposes," informed Eben Upton, founder of the Raspberry Pi Foundation.

"The extra RAM is aimed at supporting embedded Java applications on Raspberry Pi as these are quite heavyweight for 256 MB of memory," Upton added.

Exynos 5-based community board from Samsung

Chipmaker Samsung Electronics has announced Arndale—a new community development board designed around its Exynos 5 Dual system-on-chip (SoC). The Exynos 5 Dual is said



The new Raspberry Pi 'root any Android' box comes fitted with five LEDs and a toggle switch (Photo credit: www.geek.com/wp-content/uploads/2012/10/IMG_20121011_211846)

on their own then. Outler made a headless box, which allows the users to simply plug-in their devices for rooting.

The box is based on a Raspberry Pi computer with an Arduino battery. It comes fitted with a toggle switch and five LEDs that are used to communicate with the user. As soon as you connect a phone to the box, the LEDs indicate the act and finally a pass or fail LED glows to tell you what happened to the process.


The success rate of the box is around 70 per cent right now, claims Outler.

New Arduino board

Arduino has released Arduino Due—the latest addition to its Open Source development boards. The new board features SAM3X8E processor from Atmel, based on the 32-bit ARM Cortex

possible with other Arduino boards.

Arduino claims that the new platform enables the Open Source digital fabrication community (3D printers, laser cutters, CNC milling machines) to achieve higher resolutions and faster speed with fewer components than in the past.

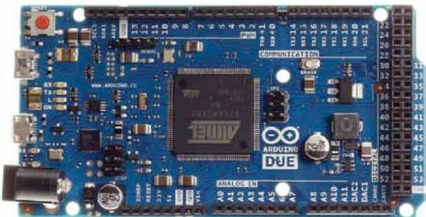

New Arduino Due 32-bit board will let your projects fly