


The True Low Power MCU Platform Making a Green Society in Full Bloom



The new RL78 MCUs achieve the industry-leading low power consumption, provide an extensive variety of different product versions, and will help developers reduce total system power and costs.

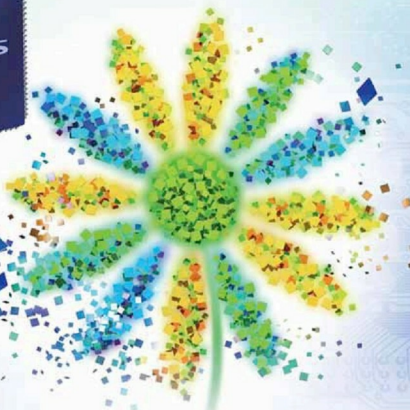

Ultimate power saving with no compromise! Operating current of only 70 $\mu\text{A}/\text{MHz}$ and standby current of 0.7 μA with the real-time clock (RTC) and low-voltage detection (LVD) functions active.

Advanced Features

■ Extremely low power consumption

- 70 $\mu\text{A}/\text{MHz}$ @32MHz
- 0.7 μA @32kHz with RTC and LVD
- 0.52 μA with WDT and LVD

■ New energy-saving SNOOZE mode

Works A/D conversion and serial data reception with stopped CPU

■ Selectable from extensive product lineup

Memory sizes from 2KB to 512KB
and package sizes from 20 to 128 pins

■ Reduce system size and cost with on-chip peripheral functions

- High-accuracy (1%) on-chip oscillator*
- Data flash memory

*target