


Low power MCU with rich functions for consumer and industrial applications



RL78/G14 is a high-function MCU of RL78 family with the industry-leading low power consumption, realizing control of home-appliance motors and system control by one chip.

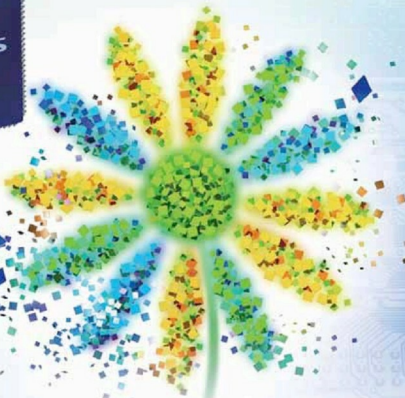

Visit us at



September 11-13, 2012

Bangalore, BIEC

Booth No 2310, Hall2

RL78 for Consumer and Industrial Applications

- An ultra low power 8/16-bit MCU enabling lower system power consumption
- 66 μ A/MHz @32MHz
- 0.57 μ A @32MHz with RTC and LVD
- New energy-saving SNOOZE mode : 0.7mA(UART), 1.2mA(ADC)
- Wide selection of memory capacities and packages suitable for consumer and industrial applications
- Memory sizes from 2KB to 512KB and packages sizes from 20 to 128 pins
- Conforms to European white goods safety standard (IEC 60730)
- Up to 1.39DMIPS/MHz
- Flash memory with ECC (error-correcting code)

RL78/G14 Rich Functions

- **Timer RD (complementary PWM mode)** generates three-phase complementary PWM output ideal for driving brushless DC motors
- **Timer RG (phase counting mode)** is ideal for counting in a two-phase encoder
- **Event link controller (ELC)** activates other on-chip modules by using interrupt signals
- **Data transfer controller (DTC)**
- **High precision(+/-1%) internal oscillator** over wide operation temperature