


Low power MCU for consumer and industrial applications



The new RL78 MCUs achieve the industry-leading low power consumption, provide an extensive variety of different product versions, and will help developers reduce total system power and costs.

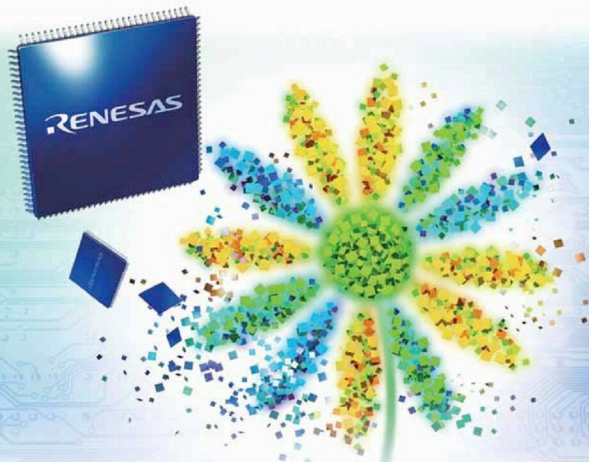

RL78 for Consumer and Industrial Applications

- An ultra low power 8/16-bit MCU enabling lower system power consumption
- Wide selection of memory capacities and packages suitable for consumer and industrial applications
- Rich peripheral functions contributing to reducing system size and cost
- Conforms to European white goods safety standard (IEC 60730)
- Up to 1.27DMIPS/MHz
- Flash memory with ECC (error-correcting code)

RL78/G12, 13 Key Features

- **Extremely low power consumption**
 - 66 μ A/MHz @32MHz
 - 0.57 μ A @32kHz with RTC and LVD
 - New energy-saving SNOOZE mode: 0.7mA (UART), 1.2mA (ADC)
- **Selectable from extensive product lineup**
Memory sizes from 2KB to 512KB and packages sizes from 20 to 128 pins
- **Extensive on-chip peripheral functions**
 - High precision ($\pm 1\%$) internal oscillator over wide operating temperature
 - Low power detection circuit
 - Data flash memory
 - Temperature sensor
 - Multi-power-supply interface port