

SUSPENSE SUSPENSE
SUSPENSE SUSPENSE
SUSPENSE SUSPENSE
SUSPENSE SUSPENSE
SUSPENSE SUSPENSE
SUSPENSE SUSPENSE



Are You In Suspense?

Are you wondering what happened to your order or payment, even after a fortnight? But did you mention your name and address clearly while sending payment, and what the payment was for?

We get several payments every month without adequate instructions or even identity of the person sending the payment. As a result we are unable to take appropriate action on these, till we get a complaint - if at all.

At EFY, we want you to be our satisfied customer. So please do let us know in case your payment or instructions are not even acknowledged within a fortnight. We are not that lazy!

Email: support@efyindia.com
Ph: 011-26810601 / 02 / 03 extn: 242



Test Results for AC LED AN3211 with a Surface-Mount PPTC

Parameter	Values									
Input voltage (V)	70	80	90	100	110	120	130	140	150	
Current (mA)	11	13	22	33	44	52	68	86	103	dropped to 13
Temperature (°C)	26	29	36	49	64	79	102	128	142	
Light output (lux)	110	430	1010	1710	2320	2950	3550	3800	4000	dropped to 420

Note: 1. Light output is measured at 12.7cm (5-inch) distance

2. Temperature is junction temperature

3. Test results will differ with different resistors, thermal design and ambient temperature

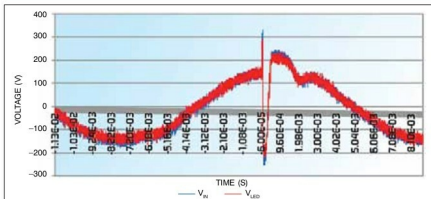


Fig. 3: AC LED AN3211 voltage response with a 7mm, 200V MOV providing over-voltage protection under 2KV 8/20 microsecond lightning surge test

decreases with increasing temperature. With a constant-voltage power supply, increasing the temperature slightly decreases V_f and increases the current by a relatively large amount. This causes a net increase in power and an increase in temperature. For a given thermal path, the heat transfer may no longer be able to keep up with the increasing power.

In extreme cases, thermal runaway is the result and may damage the AC

LED if the current or power is not limited to prescribed levels. The LED's light output varies roughly linearly with the current passing through the LED and is rated for a specified current range. If the current exceeds the manufacturer's recommendations, the LEDs can become brighter but the light output can degrade at a faster rate, shortening the useful life.

Every effort should be made to keep the LED cool for maximum ef-

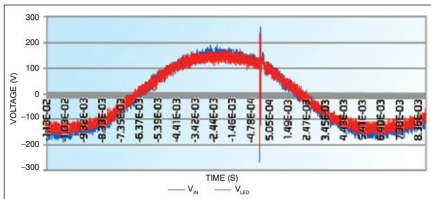


Fig. 4: AC LED AN3211 voltage response with a 7mm, 200V MOV providing over-voltage protection under 2.5kV 100kHz ring wave test