

levels, serial peripheral interface (SPI) and enhanced UART, programmable counter array with PWM and capture/

compare functions, and four 8-bit input/output ports (of which three are high-current). It also has an on-chip os-

cillator and clock circuitry, which operates up to 40MHz crystal. It supports 12 clocks per machine cycle (default)

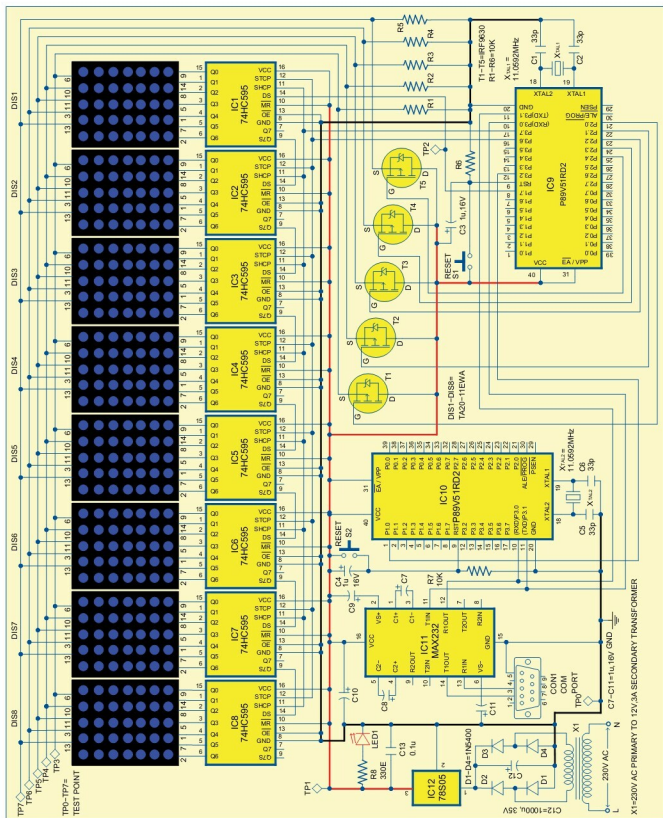


Fig. 3: Circuit of GSM-based dot-matrix display