


High-performance 32-bit RX600 MCUs for Your Most Demanding Connectivity Applications



Boasting multiple data controllers and the industry's only 100MHz embedded Flash, the RX62N and RX63N microcontrollers are high-speed data pumps, capable of handling all of your connectivity needs, including LCD Direct Drive, Ethernet, USB and CAN.

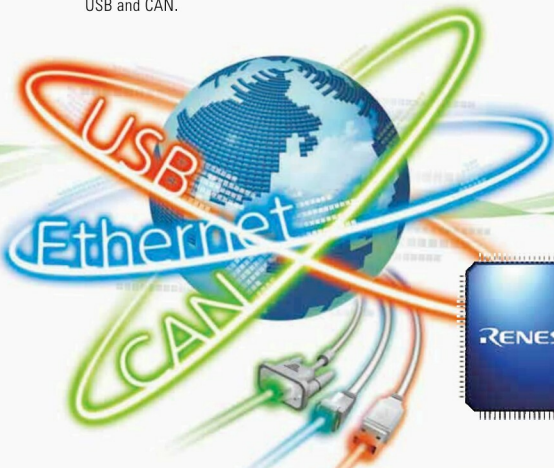

Advanced CPU Core

High performance 32 bit CPU

- Up to 100MHz, 165 DMIPS
- 0 wait state, 100MHz flash
- Enhanced Harvard, 5 stage pipeline
- DSP instructions, 32-bit FPU
- Fast interrupt – down to 5 clock cycles

High efficient core

- Up to 28% better code density
- 1mW per DMIPS – 500µA/MHz with all peripherals on

Multilayer bus interconnect

- Two internal main busses
- Six internal peripheral busses

RX62N/RX63N for Connectivity

Extremely wide platform concept

- 48 to 177 pin package options (LQFP, LGA and BGA)
- Embedded 256 KB to 2 MB Flash
- Up to 256KB SRAM

Richest connectivity peripheral set

- Up to 2x USB (H/F/OTG separate)
- Up to 4x I²C, 13xUART, 3xSPI
- Up to 3 ch of CAN 2.0B compliant interfaces
- Ethernet MAC 10/100 Mbit with DMA support
- Direct drive LCD TFT support

AES encryption and decryption function

Come & visit us

Learn today. Design tomorrow.



ESC 2013
17-19 July, 2013
Bengaluru
Booth C5