

Fig. 3: An actual-size, single-side PCB for RJ45 cable tester

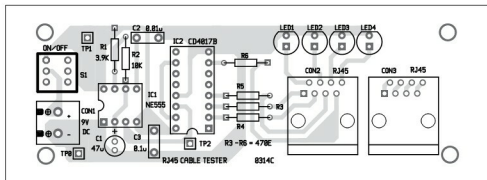


Fig. 4: Component layout for the PCB

CON3 and switch on the power supply through switch S1.

If the LEDs glow in the sequence of LED1, LED2, LED3 and LED4, the

cable under test is straight-through type and is working well. Similarly, if LEDs glow in the sequence of LED2, LED3, LED1 and LED4, the cable is crossover type and is working well. Refer Table I for the sequence of LEDs.

Construction and testing

An actual-size, single-side PCB for RJ45 cable tester is shown in Fig. 3 and its component layout in Fig. 4. After assembling the circuit on PCB, enclose it in a suitable plastic case.

Mount all the components on the PCB and enclose it in a plastic cabinet. Make arrangements in the cabinet such that CON1, CON2, CON3, S1 and LED1 through LED4 stick out of the cabinet for proper operation. The circuit is simple and does not require much testing, but do check various voltage levels on test points corresponding to test point table. ●

The author is an electronics hobbyist

India's #1 Website For Electronics Engineers Working Across The Globe

Established: 1998 | Registered Users: 300,000+

Monthly Statistics

Page Impressions:
750,000+

Unique Techies:
150,000

electronicsforu.com

If it's electronics, it's here

For any queries, please contact our team at efyencq@efyindia.com OR +91-11-26810601

Value for Quality

Transformers

- AS9100C
- ISO9001:2008
- ISO13485:2012

MIRACLE ELECTRIC DEVICES PVT LTD.

Regd. Office : #48/1, Karibobanahalli Village, Thigalarapalya Main Road,
Peenya 2nd Stage, Bangalore - 560058. (India). Tel: +91 80 28362750 / 51 | Fax: +91 80 2836 2752
sales@miracle.net.in | www.toroidal.com