

Spot an Error

And WIN Award!

You can win one thousand rupees plus a certificate from the editor of Electronics For You magazine if you spot and report any factual error in the latest issue of the magazine. Your report will be published in a coming issue of the magazine, giving credit to you.

Though every care is taken in preparation of the content for the magazine, an error can slip in at times. So we invite our learned readers to point out any error that they spot, for the benefit of the other readers.

Rules:

- The error has to be reported before end of the month that is mentioned on cover of the magazine
- The report has to be sent in writing or by email addressed to the Editor, EFM Magazine (editsec@efy.in)
- The error should be of factual nature, in the information published in the magazine, and not a typographical, grammatical or syntax error
- The correct information should also be provided along with the error spotted by you
- In case more than one person reports the same error, the one whose report reaches us the earliest will get the award money
- In case two or more persons jointly report an error, the award money will be divided amongst them
- EFY employees, their family members and friends, and EFY associates and their family members and friends are not eligible
- Decision of the editor will be final in this matter

electronics
FOR YOU

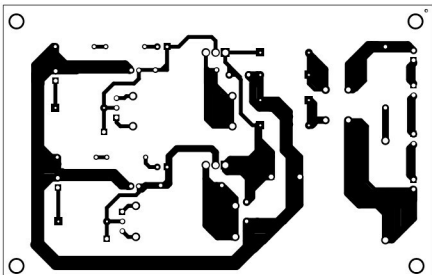


Fig. 2: Actual-size PCB of the power supply

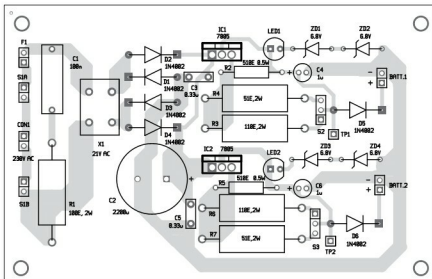


Fig. 3: Component layout of the PCB

PARTS LIST

Semiconductors:

- IC1, IC2 - 7805, 5V voltage regulator
- D1-D6 - 1N4002 rectifier diode
- ZD1-ZD4 - 6.8V zener diode
- LED1, LED2 - 5mm LED

Resistors:

- R1 - 100-ohm, 2W
- R2, R5 - 510-ohm, 0.5W
- R3, R6 - 110-ohm, 2W
- R4, R7 - 51-ohm, 2W

Capacitors:

- C1 - 100nF, 630V polystyrene
- C2 - 2200µF, 40V electrolytic
- C3, C5 - 0.33µF ceramic disk
- C4, C6 - 1µF, 35V electrolytic

Miscellaneous:

- CON1 - 2-pin connector
- S1 (S1A, S1B) - DPDT switch
- S2, S3 - SPDT switch
- X1 - 230V AC primary to 21V, 200mA secondary transformer
- F1 - 0.25A fuse with holder
- BATT.1, BATT.2 - 12V battery

Test Points

Test point	Details
TP1	15.5V
TP2	15.5V

lic part of the package and, consequently, the metallic part of at least one of the ICs should

be isolated from the common heat-sink. Panel-mount AC input, switches, fuse, output connector and battery, as per requirement. ●

Petre Tz. Petrov was a researcher and assistant professor in Technical University of Sofia, Bulgaria, and expert-lecturer in OPFPT (Casablanca), Kingdom of Morocco. Now, he is working as an electronics engineer in the private sector in Bulgaria

