


The Best Value in Electronic Test & Measurement

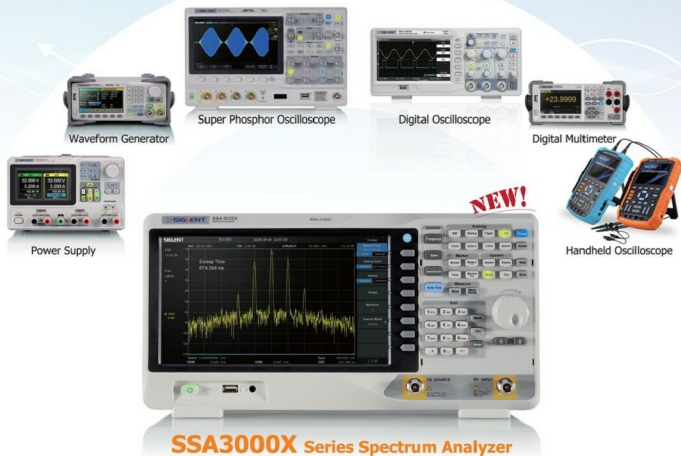

Model	SSA3032X	SSA3021X
Frequency Range	9 kHz~3.2 GHz	9 kHz~2.1 GHz
Resolution Bandwidth	10 Hz~1 MHz, in 1-3-10 sequence	
Displayed Average Noise Level	-161 dBm/Hz, Normalize to 1 Hz (typ.)	
Phase Noise	<-98 dBc/Hz@1 GHz, 10 kHz offset	
Amplitude Precision	< 0.7 dB	
TG-SSA3000X (Opt.)	Tracking Generator Kit	
EMI-SSA3000X (Opt.)	EMI measurement kit	
AMK-SSA3000X (Opt.)	Advanced measurement kit	
RefI-SSA3000X (Opt.)	Reflect measurement kit	
UKitSSA3X (Opt.)	Utility Kit: N (M) -SMA (M) cable, N (M) -N (M) cable, N (M) -BNC (F) adaptor (2 pcs), N (M) -SMA (F) adaptor (2 pcs), 10 dB attenuator	
RBSSA3X20 (Opt.)	RefI-SSA3000X, RB (1 MHz~2 GHz), N (M) -N (M) adaptor (2 pcs)	
SRP5030 (Opt.)	Near Field Probe: H field probe (4 pcs), N (M) -SMA (M) cable, N (M) -BNC (F) probe	
Display	10.1 inch WVGA (1024x600)	

Experience the World's best Quality, High Performance, User Friendly and Economic range of products with us.

SIGLENT TECHNOLOGIES CO., LTD.

Add: Blog No.4 & No.5, Antongda Industrial Zone, 3rd Liuxian Road, Bao'an District, Shenzhen, 518101, China.
Tel: +86 755 3661 5186; Email: sales@siglent.com; Website: <http://www.siglent.com/usa/>.

 **SIGLENT**®