



GEIST

MONITOR | Watchdog**Monitor:**

Environmental factors like heat, humidity and moisture pose a severe threat to your mission-critical infrastructure.

These dangers can be minimized by incorporating a network of Geist sensors to collect data and alert users to potential threats.

Geist's line of monitoring products allows users to observe conditions from a secure Web interface and receive SNMP, email, text message or voice call alert notifications when environmental sensors detect a problem.

The Web interface can display live video surveillance and environmental measurements including temperature, humidity, airflow, light, sound, power and water detection.

Measurements are logged to track trends. Units equipped with dry-contact relay outputs can be used to trigger external devices, either automatically via programmed alarm thresholds or manually via the Web interface.

Watchdog 15 and**Watchdog 15-PoE Specifications**

Ethernet Connection. 6-8 VDC Power Supply. Optional Power-over-Ethernet (PoE). Power On Indicator. IP Reset Button. Two Digital Sensor Ports (capacity of four external sensors). On-board Sensors. FCC Part 15 Class A Conformance.

Temperature Range:

-13° F to 176° F (-25° C to 80° C), +/- 0.5° C

Humidity: 5% to 95%, +/- 3%

Chassis Dimensions: 1.72" H x 5.22" W x 1.29" D

**Watchdog 100 and****Watchdog 100-PoE Specifications**

Ethernet Connection. 6 VDC Power Supply. Optional Power-over-Ethernet (PoE). Power On Indicator. Idle/Activity Indicator. IP Reset Button. One Digital Sensor Port (connect up to four using splitters). Four Analog Sensor Ports. One Output Relay. On-board Sensors. FCC Part 15 Class A Conformance.

Max Switching Capacity: DC: 60V, 30W / AC: 30Vrms, 1A

Temperature Range:

-4° F to 176° F (-20° C to 80° C), +/- 0.5° C

Humidity: 5% to 95%, +/- 3%

Chassis Dimensions: 1.6" H x 8.5" W x 2.5" D
(with 19" mounting brackets)


**Watchdog 1400 and****Watchdog 1400-PoE Specifications**

Ethernet Connection. 6 VDC Power Supply. Power On Indicator. Idle/Activity Indicator. Optional Power-over-Ethernet (PoE). IP Reset Button. Four Digital Sensor Ports (capacity of 16 with splitters). Six Analog Sensor Ports. Three Relay Outputs. On-board Sensors. LCD Display. Audible Alarm. FCC Part 15 Class A Conformance.

Temperature Range:

-22° F to 185° F (-30° C to 85° C), +/- .5° C

Chassis Dimensions: 1.61" H x 17" W x 1.61" D

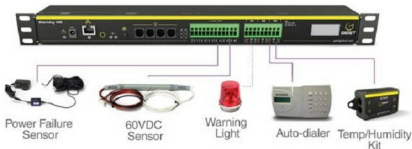

OFFICIAL & ONLY DISTRIBUTOR OF GEIST'S MONITORING PRODUCTS IN INDIA, FOR MORE INFORMATION CONTACT US:

SAHASRA ELECTRONICS (A SAHASRA GROUP COMPANY)

Plot No. 129 - G, NOIDA SPECIAL ECONOMIC ZONE (NSEZ) NOIDA - II, Uttar Pradesh - 201305, INDIA

Tel- 0120 2462782 / 2462783, Fax - 0120 2563119

Email: contact@sahasraelectronics.com | Web: www.sahasraelectronics.com