


Photocouplers

-Optically Isolation Amplifier-



**Toshiba Launches High-precision Optical Coupled Isolation Amplifiers
Equipped with a Delta-Sigma AD Converter**

Internal Circuit (analog output)

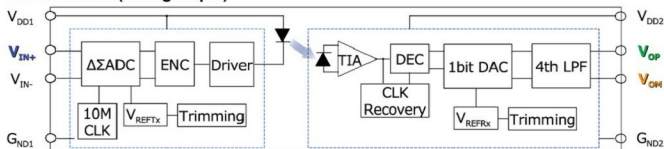

TLP7820 and TLP7920 are first analog output type isolation amplifier in Toshiba.

	TLP7820	TLP7920
Package Height	2.3 mm	4.0 mm
Output type	Single phase = 0 ~ 2.5V	
Operation temperature : T_{opr}	-40 to 105°C	
Input Voltage Range	$\pm 200\text{mV} / \pm 300\text{mV}$	
Gain error(25°C)	$\pm 0.5 / \pm 1 / \pm 3\%$	
Magnitude of Gain	15ppm/degC	
Common-mode Transient immunity	15kV/us (min)	
Small Signal Bandwidth (-3dB)	(Min140)230kHz	
V_{DD1} Supply current : I_{DD1}	8.6(Max12)mA	
Isolation voltage : BV_s	5000 V _{rms}	

TLP7820
SO8L



TLP7920
DIP8




-Thinner package SO8L(height:2.3mm)>40% thinner than conventional DIP8
-lower power consumption designing >33% less than conventional part

Application

Servo Motor Drives
General-purpose inverters
CNC Drive Unit
UPS
Digital Power Supply

Voltage / Current Feedback to MCU

Isolation Amplifier Application example

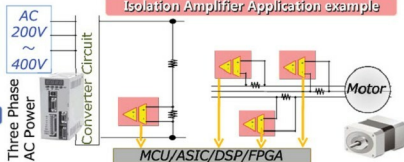

News URL

<http://toshiba.semicon-storage.com/ap-en/company/news/news-topics/2015/09/opto-20150911-1.html>

Toshiba Corporation
Semiconductor & Storage Products Company

Contact at: Arun Kumar : +91-9810121489, Email: arun.kumar@toshiba-india.com
<http://toshiba.semicon-storage.com/ap-en/top.html>