


Isolated RS485 + 1W Power

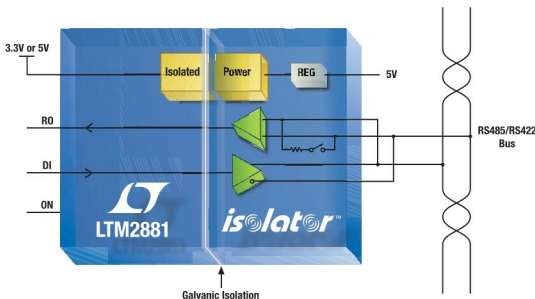

Complete 20Mbps μ Module[®] Transceiver Includes 2500V_{RMS} Isolated Power— No External Components Required

The LTM[®]2881 is an isolated RS485 transceiver that guards against large ground-to-ground differentials. The LTM2881's internal inductive isolation barrier breaks ground loops by isolating the logic level interface and line transceiver. An onboard DC/DC converter provides power to the transceiver with an isolated 5V supply output for powering additional system circuitry. With 2500V_{RMS} galvanic isolation, onboard secondary power and a fully compliant RS485 transmitter and receiver, the LTM2881 requires no external components and provides a small, complete μ Module solution for isolated serial data communications.

▼ Features

- Isolator μ Module Technology
- Isolated RS485/RS422 Transceiver: 2500V_{RMS}
- Integrated Isolated, 1W DC/DC Converter
 - Good Efficiency (up to 62%)
 - Low EMI
- 3.3V or 5V Input Supply Voltage (LTM2881-3/LTM2881-5)
- 20Mbps or Low EMI 250kbps Data Rate
- High ESD: ± 15 kV HBM
- Common Mode Transient Immunity: >30 kV/ μ s
- Integrated Selectable 120 Ω Termination
- Small Footprint, Low Profile (11.25mm x 15mm x 2.8mm) in Surface Mount LGA & BGA Packages

LTM2881 Demo Board



▼ Nu Horizons Electronics

- Bangalore
Phone: (91) 80 4123 5217
- Chennai
Phone: (91) 96 0001 8430
- Hyderabad
Phone: (91) 40 6631 6357
- New Delhi
Phone: (91) 11 4167 4374/75
- Pune
Phone: (91) 20 2422 0071/78

LT, LTC, LT, LTM and μ Module are registered trademarks and Isolator logo is a trademark of Linear Technology Corporation. All other trademarks are the property of their respective owners.