

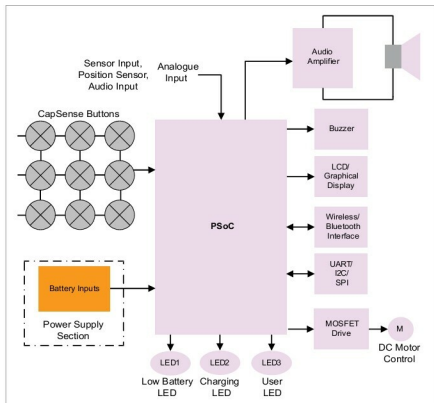


Fig. 2: PSoC based block diagram

DIFFERENT END TOY APPLICATIONS

MCU features	End toy applications
SoC with flash memory	Remote controllers and remote controlled toys (cars, helicopters, planes, boats, robots, etc)
SoC with one-time programmable memory for low-end devices	Low-end, entry-level toys and toys that do not support firmware upgrades
SoC with flash memory and full-speed USB support	USB dongles for PC connectivity (also support firmware upgrades), USB support for console and PC dongles and toys that support firmware upgrades
Radio-on-a-chip with 2Mbps, 1Mbps and 250kbps data rate	Any wireless end product



Fig. 3: Some toy applications

with other onboard peripherals (like camera interface controller) through I2C, SPI and UART interfaces.

Toy applications are battery-operated and use coin-cell or lithium-ion batteries for operation. The MCU monitors the coin-cell and lithium-ion battery voltage. It is also used

for battery-charging, fault-detection and data-recovery applications.

An MCU on proprietary 2.4GHz technology is targeted at remote-controlled toys segment; gaming controllers and remote-controlled toys are also witnessing customers shifting from IR to radio frequency (RF) range.

Implementation of PSoC in electronic toy applications

A PSoC is a combination of an MCU with programmable logic and high-performance analogue-to-digi-

MECO[®]

SINCE 1962

TRMS DIGITAL MULTIMETERS



153B+TRMS

171B+TRMS

3% Digit 6000 Count LCD with Backlight

- Auto Ranging
- 600mV ~ 1000V DC
- 600mV ~ 750V AC TRMS
- 600μA ~ 20A DC
- 600μA ~ 20A AC TRMS
- 600Ω ~ 60MΩ
- 9.999nF ~ 9.999mF
- 99.99Hz ~ 20.00MHz
- 0.1% ~ 99.9% Duty Cycle
- -40°C ~ 1000°C (-40°F ~ 1832°F)
- (171B+TRMS)
- K Type Thermocouple (Upto 260°C)
- (171B+TRMS)
- REL Δ, Max/Min (171B+TRMS)
- Diode Test, Data Hold, Audible Continuity, Auto Power off & Low Battery Indicator

Meco Meters Private Limited

Plot No. EL-60, MIDC Electronic Zone,
TTC Industrial Area, Mahape,
Navi Mumbai - 400710 (INDIA)
Tel : 0091-22-2767 3300 (Board), 2767 3311-16 (Sales)
Fax : 0091-22-27673310, 27673330
Email : sales@mecoinst.com
Web : www.mecoinst.com