

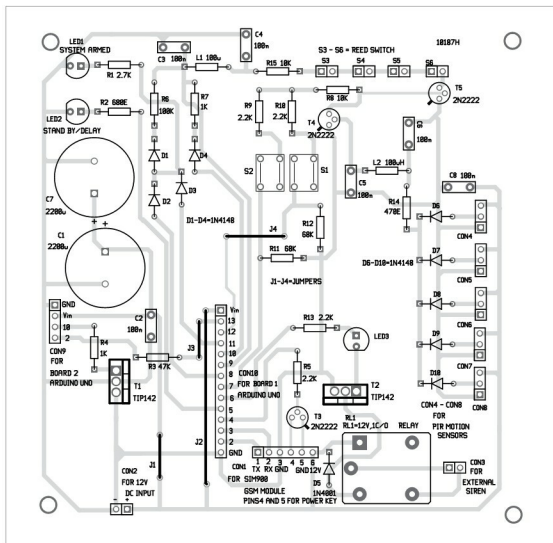


Fig. 3: Component layout of the PCB

warehouses, shops, banks and office buildings.

Software

Software is written in Arduino programming language. Arduino Uno Board 1 and Board 2 are programmed using Arduino IDE software. Atmega328P on Arduino Uno comes with a pre-programmed

bootloader that allows you to upload a new code to it without using an external hardware programmer.

Connect both Arduino boards one by one to the PC and select the correct COM port in Arduino IDE. Compile the program (sketch). Then, select the correct board from Tools→Board menu in Arduino IDE and upload the sketch.

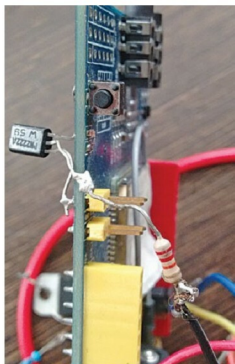


Fig. 4: Author's prototype showing transistor T3 connected to power key terminal of the GSM module

Arduino1.ino sketch is at the heart of the alarm system and carries out all major functions of the circuit. Arduino2.ino sketch is used to reset Board 1 and GSM module by switching off the power for a few seconds

via T1. Please refer to source codes for details.

The author's prototype is shown in Fig. 4. **EFY**



Joy Mukherji is an electronics hobbyist and a small business owner in New York, USA, and Lucknow, India. His interests include designing radio-frequency circuits

THE COMPLETE MAGAZINE ON OPEN SOURCE

OpenSource
ForYou

Your favourite Magazine on
Open Source is now on the Web, too.

OpenSourceForU.com

Follow us on Twitter @LinuxForYou