

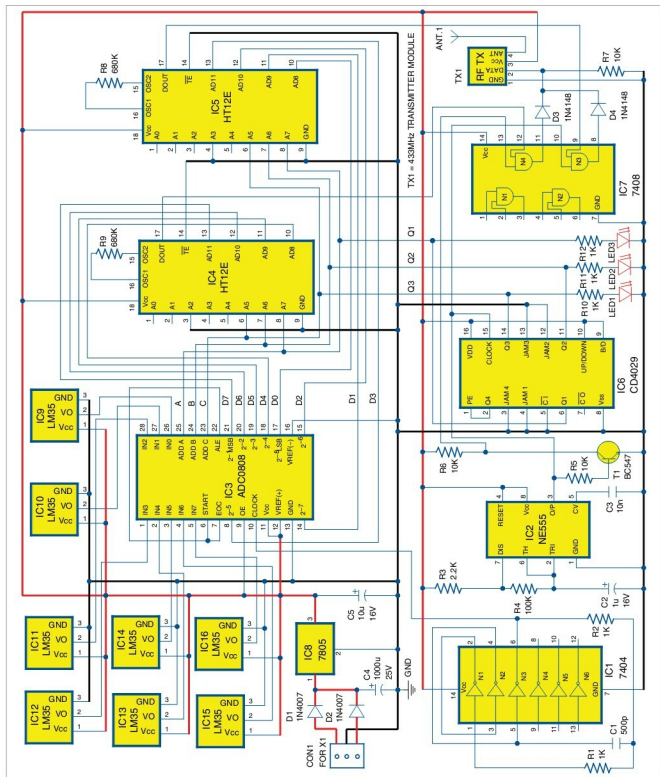


Fig. 2: Circuit diagram of the transmitter unit

at the antenna point of the module.

Receiver. Fig. 3 shows the receiving unit of the wireless addressable digital thermometer. RX1, a 433MHz

RF receiver module, is used to receive and demodulate ASK-modulated RF signal transmitted by TX1 of the transmitter unit. Demodulated

output is a train of rectangular pulses comprising a 4-bit data nibble and destined for a particular decoder as explained earlier.