

EFY Note

The source code of this project is included in this month's EFY DVD and is also available for free download at source.efymag.com

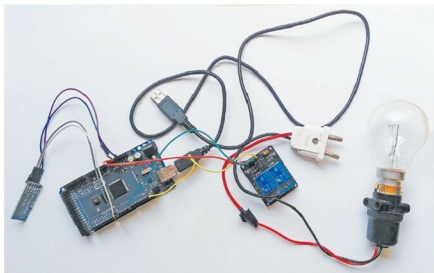


Fig. 6: Author's prototype

Assemble the circuit on the PCB to minimise time and assembly errors. CON1 is used to connect HC-05 module, CON2 and CON3 are 2-pin connectors used to connect 230V AC mains and load (bulb), respectively.

CON4 is used to connect Arduino board (Board1).

Power on Arduino board using a 9V DC battery (or any USB 5V DC power supply) to enjoy wireless control of your home appliances

via speech. Upload Bluetalk.ino sketch into Arduino board and install Bluetalk.apk on your Android phone.

Pair your Android's Bluetooth to HC-05 module. It will prompt you to enter a password. Default password is 1234. Open the app and connect to HC-05 again. Your system is ready to work.

Touch 'Speak' icon on the app, say 'Turn On' in front of your smartphone to turn the appliance on and 'Turn Off' to turn it off. Author's prototype is shown in Fig. 6. **EFY**



Madhav Shyam Lakhera is a Space science enthusiast interested in DIY projects, engineering and research

IT'S TIME TO PROMOTE DESIGN IN INDIA

<http://designindia.electronicshub.com>



Design **IN** India

Section launched on Electronicsforu.com to showcase design houses and innovators of India who are creating innovative electronic hardware products. If your firm has also launched or designed an innovative product for OEMs, share your details with us at editsec@efy.in.

An **EFYGROUP** INITIATIVE

DISPLAY
ELECTRONIC ASSEMBLY
VISIONS

**ELECTRONIC
ASSEMBLY**
new display design

- Graphic with SPI
- LCD/TFT, OLED, ePaper
- Intelligent Solutions
- 3.3V / 5V
- Accessories
- USB EVAL kits
- WLAN data logger

Wir freuen uns
auf Ihren Besuch:
electronica 2016
inside tomorrow
Halle A3
Stand 200

JOIN
OUR
DISPLAY
WORLD

ELECTRONIC ASSEMBLY GmbH
sales@lcd-module.com • www.lcd-module.com