


Get more value with STM32 Value Line MCUs Now Expanded upto 512KB Memory



STM32 Value line block diagram

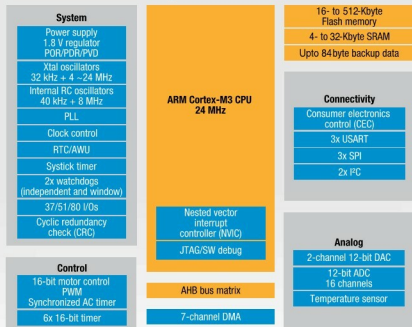

Abbreviations:

AWU: Auto wakeup from halt
BDR: Brown-out reset
PC: Intergrated circuit

PDR: Power-down reset
PVD: Programmable voltage detector

Power-down reset
Power-on reset
Programmable voltage detector

RTC: Real-time clock
SPI: Serial peripheral interface
USART: Universal synchronous receiver transmitter

Real-time clock
Serial peripheral interface
Universal synchronous receiver transmitter

STMicroelectronics

The most accessible STM32 with optimized features
for a greater choice in price-sensitive designs



- Cortex™-M3 providing 1.25 DMIPS/MHz
- Up to 11 PWM 16-bit timers supporting motor control
- Static memory controller with parallel LCD interface
- Advanced analog with 12-bit ADC and DAC
- CEC hardware function
- 16-Kbyte to 512-Kbyte embedded Flash
- 48-pin to 144-pin packages
- All devices pin-to-pin and software compatible

Passionate to design
your own projects?

FREE

STM32VL
Discovery
Tool Kits from
ST can help
realize your
dreams



To qualify, log on to:
www.electronicsforu.com/stoffer

See you at Electronica India 2011, Hall No.12.A, Sep 13-16, Pragati Maidan

www.st.com/mcu

Authorized Distributors

Yosun: +91 9810606001, rathin_k@yosun.com.sg | WT: +91 9886657305, meganathan@wtmc.com | Tomen: +91 9819157793, sandeep.p@tomen-ele.co.in
Teck: +91 9810728299, suren@lionex-tech.com.sg | Ramakrishna: +91 9810679077, ashish.juthra@rkselectro.com | Future: +91 11 4788 1111, vivek.sharma@futureelectronics.com
EDOM: +91 9902865243, ravikumard@edom-tech.com | Avnet: +91 9818001379, rajatshuvra.datta@avnet.com | Arrow: +91 80 4135 3800, muralidharan.g@arrowasia.com