


The True Low Power MCU Platform Making a Green Society in Full Bloom



The new RL78 MCUs achieve the industry-leading low power consumption, provide an extensive variety of different product versions, and will help developers reduce total system power and costs.

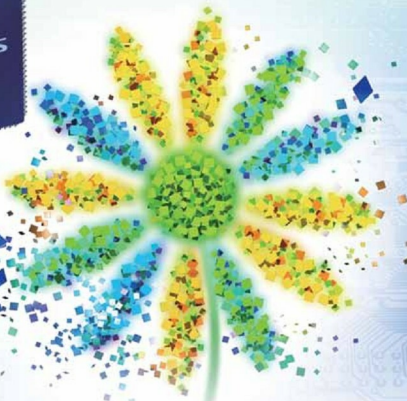

Visit us at

 **electronica India**

September 13-16, 2011
Pragati Maidan, New Delhi
Booth No 2415, Hall 12A

Ultimate power saving with no compromise! Operating current of only 70 $\mu\text{A}/\text{MHz}$ and standby current of 0.7 μA with the real-time clock (RTC) and low-voltage detection (LVD) functions active.

Advanced Features

■ Extremely low power consumption

- 70 $\mu\text{A}/\text{MHz}$ @32MHz
- 0.7 μA @32kHz with RTC and LVD
- 0.52 μA with WDT and LVD

■ New energy-saving SNOOZE mode

Works A/D conversion and serial data reception with stopped CPU

■ Selectable from extensive product lineup

Memory sizes from 2KB to 512KB and package sizes from 20 to 128 pins

■ Reduce system size and cost with on-chip peripheral functions

- High-accuracy (1%) on-chip oscillator*
- Data flash memory

*target

RL78 for You

**Register now for a free
RL78 promotional board!**

[http://sg.renesas.com/
ReachRL78RPB/f](http://sg.renesas.com/ReachRL78RPB/f)



Renesas Electronics Corporation

RENESAS