


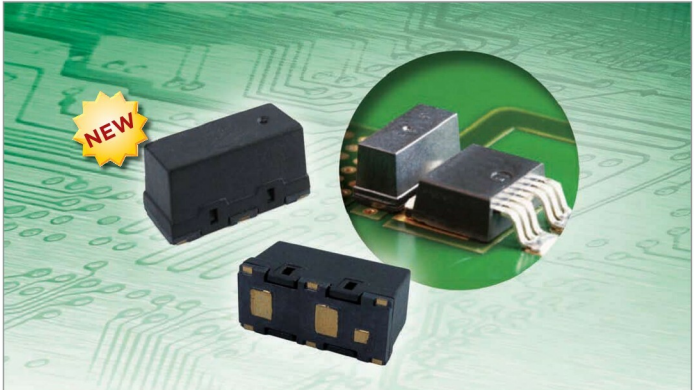

NEW

Reflowable Thermal Protection (RTP) Devices

Reflowable Thermal Protection Solutions for Power Electronics Designs in Rugged Environments

Features:

- Opens at temperature below critical thermal threshold
- Compatible with up to 3 Pb-free solder reflow processes with peak temperatures up to 260°C
- Low series resistance
- DC interrupt voltage capable
- Robust design for harsh environment tested per stringent qualification specification
- RoHS compliant, lead and halogen free

Applications:

- Helps provide protection against thermal runaway for powerFETs and other components if failure occurs in applications such as automotive HVAC, ABS, power steering, DC/DC converters, PTC heaters, etc. or IT servers, telecom power, converters, etc.
- Other DC thermal protection

www.circuitprotection.com

• India Tel: 91-80-4161-3745 Mobile: 91-99-0248-8886 Email: badsha@te.com
• Singapore Tel: 65-6590-5089 Fax: 65-6481-9377 Email: ssebast@te.com

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. company. All rights reserved. • www.te.com
TE Connectivity, TE connectivity (Logo) and TE (logo) are trademarks.

 **TE**
connectivity