

32 tessellation engines that can power today's cutting-edge DX11 games at resolutions of 2560x1600 and higher. With four separate video outputs on each card, consumers can configure their PC with four independent displays, or they can span their gaming across three 3D displays, at a resolution of up to 5760x1080 for an intense, immersive, stereoscopic gaming experience utilising NVIDIA 3D Vision surround technology.


Lowest-noise operational amplifier

Analog Devices Inc. (ADI) claims its ADA4528 to be the industry's lowest-noise, zero-drift operational amplifier. Designed for instrumentation and medical applications that require precision over time and temperature without system calibration, the ADA4528 achieves an ultra-low integrated voltage noise of 99 nVp-p over 0.1-10 Hz. This improves the system's signal-to-noise ratio and lowers the noise floor, enabling 24-bit resolution over 150 kHz in analogue-to-digital converters while improving system accuracy.

The 5.3nV/rtHz voltage noise density allows designers to use the zero-drift amplifier in broadband applications like piezoelectric transducers and precision data acquisition systems. The chopping technique allows it to achieve high levels of accuracy required for low-frequency sensor measurements in data acquisition, weighing scale and precision medical instrumentation applications.

Smallest full-featured waveform monitor

Tektronix claims to have developed the world's smallest full-featured waveform monitor and rasteriser to meet the needs of video content production, post production and broadcast. The products can monitor up to four 3G-serial digit interface signals simultaneously and are well suited for use in outside broadcasting vans, studio control rooms and post-production

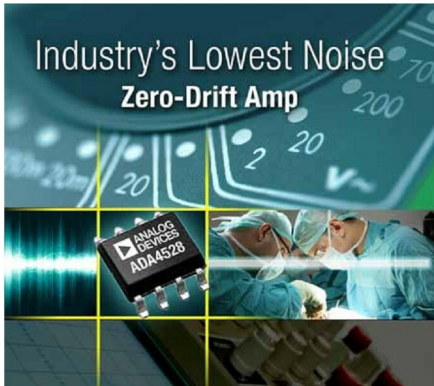

ADI's ADA4528—industry's lowest-noise, zero-drift operational amplifier

houses doing editing, special effects and colour correction.

With software that can be tailored to specific applications, the instruments meet the growing trend towards 'fit for purpose' products that can easily be integrated into an existing system architecture. The WFM5200 waveform monitor weighs just over 1.12 kg, the WVR5200 rasteriser weighs less than 750 gm and both are under 15.2cm (6-inch) deep.

The compact WFM/WVR5200 come with a comprehensive set of colour gamut monitoring features, including Tektronix-patented Spearhead and Luma Qualified Vector displays for colour correction and grading applications.

Highest-performance millimetre-wave signal analyser

Agilent Technologies claims its PXA to be the industry's highest-performance millimetre-wave signal analyser, covering frequencies up to 50 GHz. With external mixing, it can cover 325 GHz

and beyond. The result is easier, more accurate millimetre-wave measurements.

The analyser uses low noise path and noise floor extension technologies to remove the distortion noise and further widen the dynamic range. This allows it to measure the smallest of signals in the presence of very large signals, enabling test engineers to develop advanced radar, surveillance and wireless communication systems. Extending this performance to 325 GHz and beyond allows technology development for advanced radio astronomy research and new imaging techniques used in the medical and air travel industries.

The lower noise offered in all measurement configurations allows the PXA to achieve the same sensitivity as other analysers at a resolution bandwidth that is ten times greater, resulting in sweep times of a hundred times faster or more. In many cases, this eliminates the need for the engineer to sacrifice test times for dynamic range.

Check efytimes.com for more news, daily