


Connect To The Smart Grid Today

Ensuring Ultimate Precision in Substation Timing with IEEE 1588v2

IEC 61850-3 modular IEEE 1588 v2 Ethernet switches

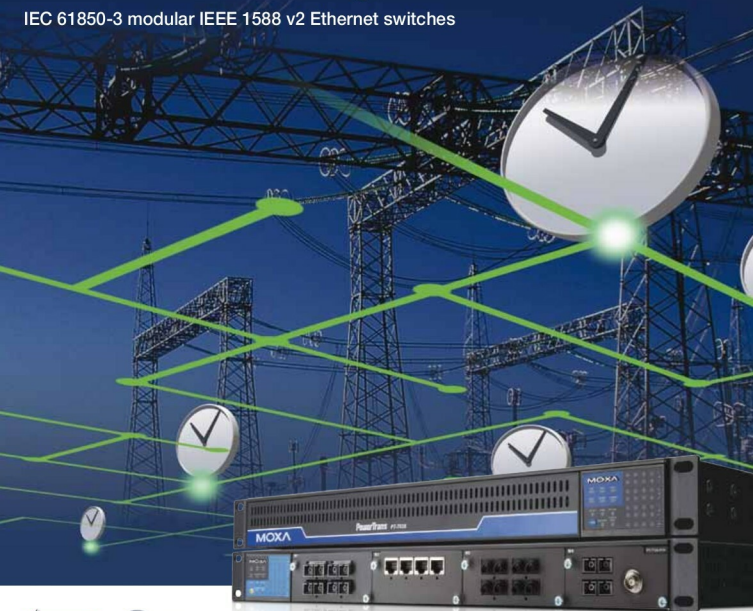

- IEEE 1588 version 2 compliant
- Nanosecond accuracy
- Zero packet loss
- IEC 61850-3 and IEEE 1613 certified
- -40 to 85°C operating temperature (no fans)

With over twenty years of expertise in industrial automation, Moxa has over 300 successful substation deployments around the world

The Moxa PowerTrans series is specifically tailored for power substations, and offers strong EMI immunity, a wide -40 to 85°C operating temperature range, and isolated redundant power inputs. The PT-7728-PTP series supports the IEEE 1588 v2 protocol to handle the synchronization requirements of future substation automation applications. The hardware time stamp allows highly precise time synchronization over the Ethernet network, delivering low jitter with accuracy exceeding 1 μ s.



DYNALOG
(INDIA) LIMITED

Dynalog (India) Limited

Kailash Vaibhav, Parkside, Vikhroli (West), Mumbai - 400 079.

Tel: +91 - 22 - 2518 1900 | Fax: +91 - 22 - 2518 1930/40

www.dynalogindia.com | sales@dynalogindia.com

Ahmedabad | Bangalore | Dehradun | Mumbai | Pune | New Delhi

MOXA®

www.moxa.com

india@moxa.com

Tel: +91-80-4172-9088