


Nordic PMIC's

nPM FAMILY



nPM1100

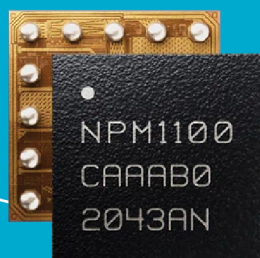

nPM1300

Efficiency Redefined:

Minimize Power, Space and Components


Power Management IC

	nPM1300	nPM1100
FEATURES	PMIC	
	BUCK REGULATOR	2
	BATTERY CHARGER	1
	LDO	2
CHARGER	LOAD SWITCH	2
	TERMINATION VOLTAGE	3.5 to 4.45 V
	MAX CHARGING CURRENT	800 mA
	POWER PATH MANAGEMENT	4.1 to 4.2 V or 4.25 to 4.35 V
POWER RAILS	THERMAL PROTECTION	2
	BATTERY COMPATIBILITY	LiFePO4, Li-ion, LiPo
	INPUT VOLTAGE	4 to 5.5 V
	USB COMPLIANCE	Type-C
SYSTEM MANAGEMENT	REGULATED OUTPUT VOLTAGE	1 to 3.3 V
	MAX CURRENT PER BUCK	200 mA, 200 mA
	ADC	10-bit
	FUEL GAUGE	1
REGULATORY COMPLIANCE	HARD SYSTEM RESET	2
	TIMED WAKE-UP	2
	WATCHDOG TIMER	2
	SHIP MODE / HIBERNATE	2
OPERATING TEMPERATURE	BROWN-OUT DETECTOR	2
	LED DRIVERS, GPIOs	3, 5
	CONTROL INTERFACE	2, 0
		TWI
EVALUATION KITS		Pin-configurable
PACKAGE OPTIONS		CE, JEITA, RoHS
		CE, JEITA, RoHS
		-40 to 85°C
		-40 to 85°C
		nPM1300 EK
		nPM1100 EK
		5x5 mm QFN32, 3.1x2.4 mm WLCSP
		4x4 mm QFN24, 2.1x2.1 mm WLCSP

Benefits




Maximum Energy Efficiency



High Integration



Seamless development

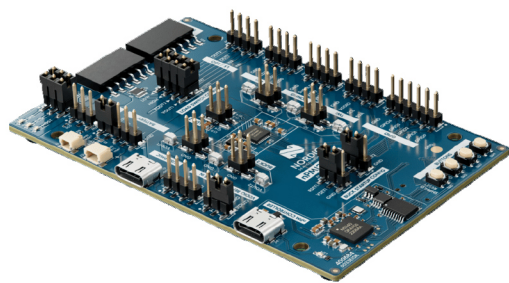

Millennium's Offerings

- Samples & EV Boards
- Technical support for designing

Millennium Semiconductors is an authorized distributor of Nordic Semiconductor



marcom@millinniumsemi.com



9130015701 / 9028488164

VISIT
WEBSITE



MILLENNIUM
SEMICONDUCTORS



NORDIC
SEMICONDUCTOR