

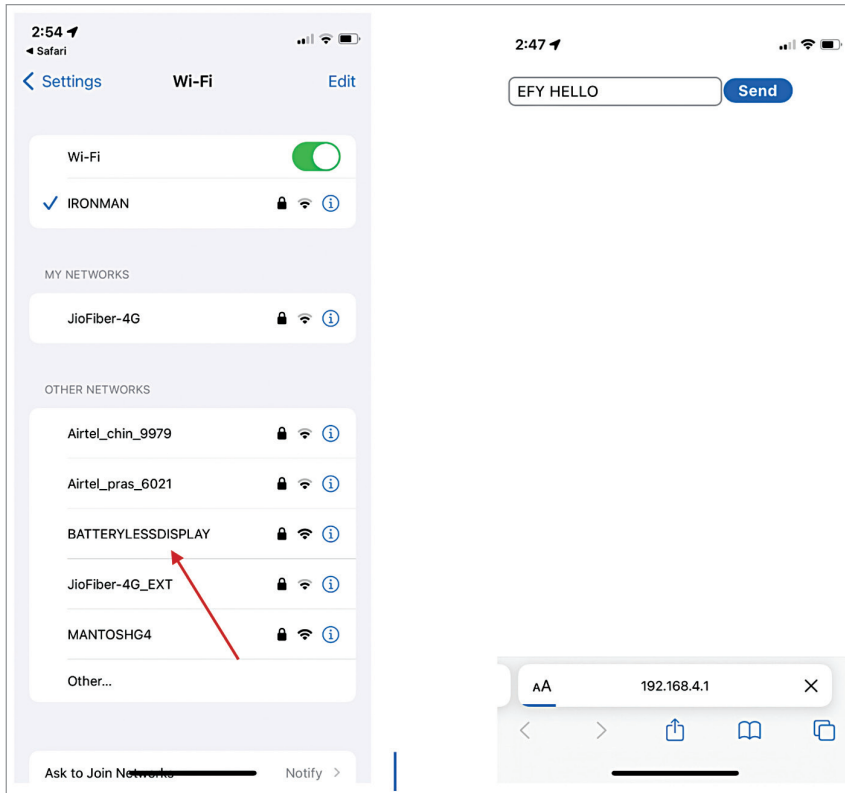


Fig. 13: Phone hotspot display

as the board has flexible SPI; any GPIO can be used. Fig. 10 displays the energy harvesting coil with the Indusboard, and Fig. 11 displays the energy harvesting coil with the e-ink display.

In the source code, define the SPI pins as per connections, set the display hotspot name and password, and then upload the code to the Indusboard by selecting the right

board and port in the Arduino IDE. Fig. 12 shows a screenshot of the source code.

To update the display, place the display on any wireless charger or powering coil and then open the phone. Connect the phone with the display hotspot; here, its name is “BATERYLESSDISPLAY,” as shown in Fig. 13. Now, insert the password; by default, the password is 1234567890. Search the IP address in the web browser and send the text to display. Within seconds, the display will get updated from the harvesting coil, and the display will be ready with the new screen. **EFY**

EFY Note
The source code
of this project
is available
for free download at
www.electronicsforu.com

Ashwini Kumar Sinha is a tech journalist at EFY, with hands-on expertise in electronics DIY. He is passionate about AI, IoT, and electronics. He holds two design contest records and is two times winner of US-China Makers Award.

www.efy.in

EFYGROUP
YOURS SINCE 1969

“
Branding is
what people
say about
you when
you are not
in the room.
”



-Jeff Bezos

