



VNA & Accessories



SHN900A Portable VNA


- Frequency Range: 30 kHz ~ 26.5 GHz
- Range of IFBW: 10 Hz ~ 3 MHz
- Dynamic Range: 110 dB (typ.)
- Enhanced TDR with eye diagram simulation option

Adjustable TDR/TDT Probe

With this adjustable probe, the distance between test probes can be adjusted between 0 mm - 6.5 mm through the built-in adjusting wheel, and the test can be carried out quickly.

SEM5000A Electronic Calibration Modules

When calibrating with electronic calibrators, the operator only needs to make one connection. At the very beginning, the port of the electronic calibrator is connected to the test port.

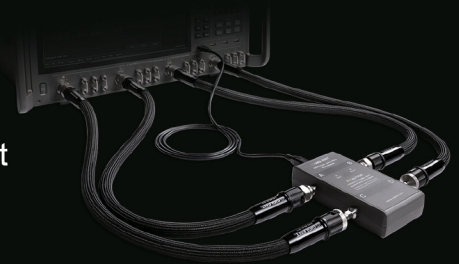

SNA5000A VNA

- Frequency Range: 9 kHz ~ 8.5 GHz / 100 kHz ~ 26.5 GHz
- Frequency Resolution: 1 Hz
- Setting Range of Output Level: -55 ~ +10 dBm
- Dynamic Range: 125 dB

SSM5000A Switch Matrix

- Maximum frequency: 9 GHz / 26.5 GHz
- Maximum number of input ports: 4
- Maximum number of output ports: 24
- Support a simplified multi-port calibration algorithm



E-mail: rakesh.sen@siglent.com; sales@siglent.com Cell No.: +91 83196 88725 Website: int.siglent.com



electronica India 2024 September 11-12-13

Booth No: H5.I05 India Expo Mart (IEML), Greater Noida, Delhi NCR