

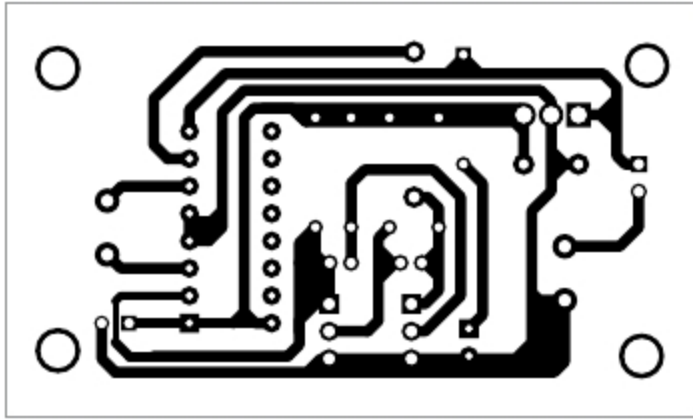


Fig. 4: Actual-size PCB layout of low-cost and versatile hand mixer

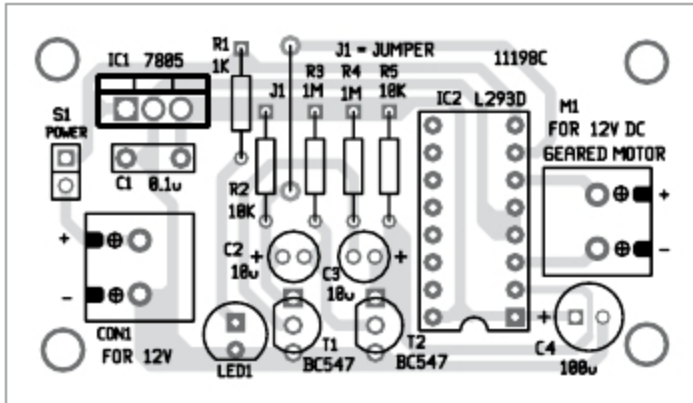


Fig. 5: Components layout for the PCB

as the traditional method using hands. When you power on the circuit using

switch S1, the geared motor first rotates the churner clockwise and then anti-clockwise. The cycle repeats until the contents are mixed properly. A traditional churner is shown in Fig. 3.

Construction and testing

An actual-size PCB layout for the low-cost and versatile hand mixer is shown in Fig. 4 and its components layout in Fig. 5. After assembling the circuit on the PCB, connect 12V across CON1. Connect 12V, 500- to 1000-rpm geared motor across M1.


To use with a motor, take a muddler or churner and cut its rod as per required length. Then, take an old marker pen. Cut both ends of the same according to required length. Stick the churner head to the motor shaft using the marker pen. To give it a finished looked, take a cylin-



Fig. 6: Author's final product


drical container of suitable size, place the PCB inside and attach the motor to the lid cover. Fix on/off switch inside or on the enclosure for powering up the circuit. Your low-cost hand mixer is ready for use.

The author's final product in which assembled PCB is fitted inside the plastic box is shown in Fig. 6. **EFY**

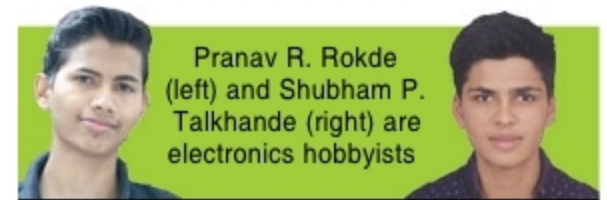

TAIYO YUDEN's Energy Devices Proposal for Smart Meters

Taiyo Yuden's Energy Devices can achieve high reliability at high temperature environment. For RTC back-up, last gasp and etc.

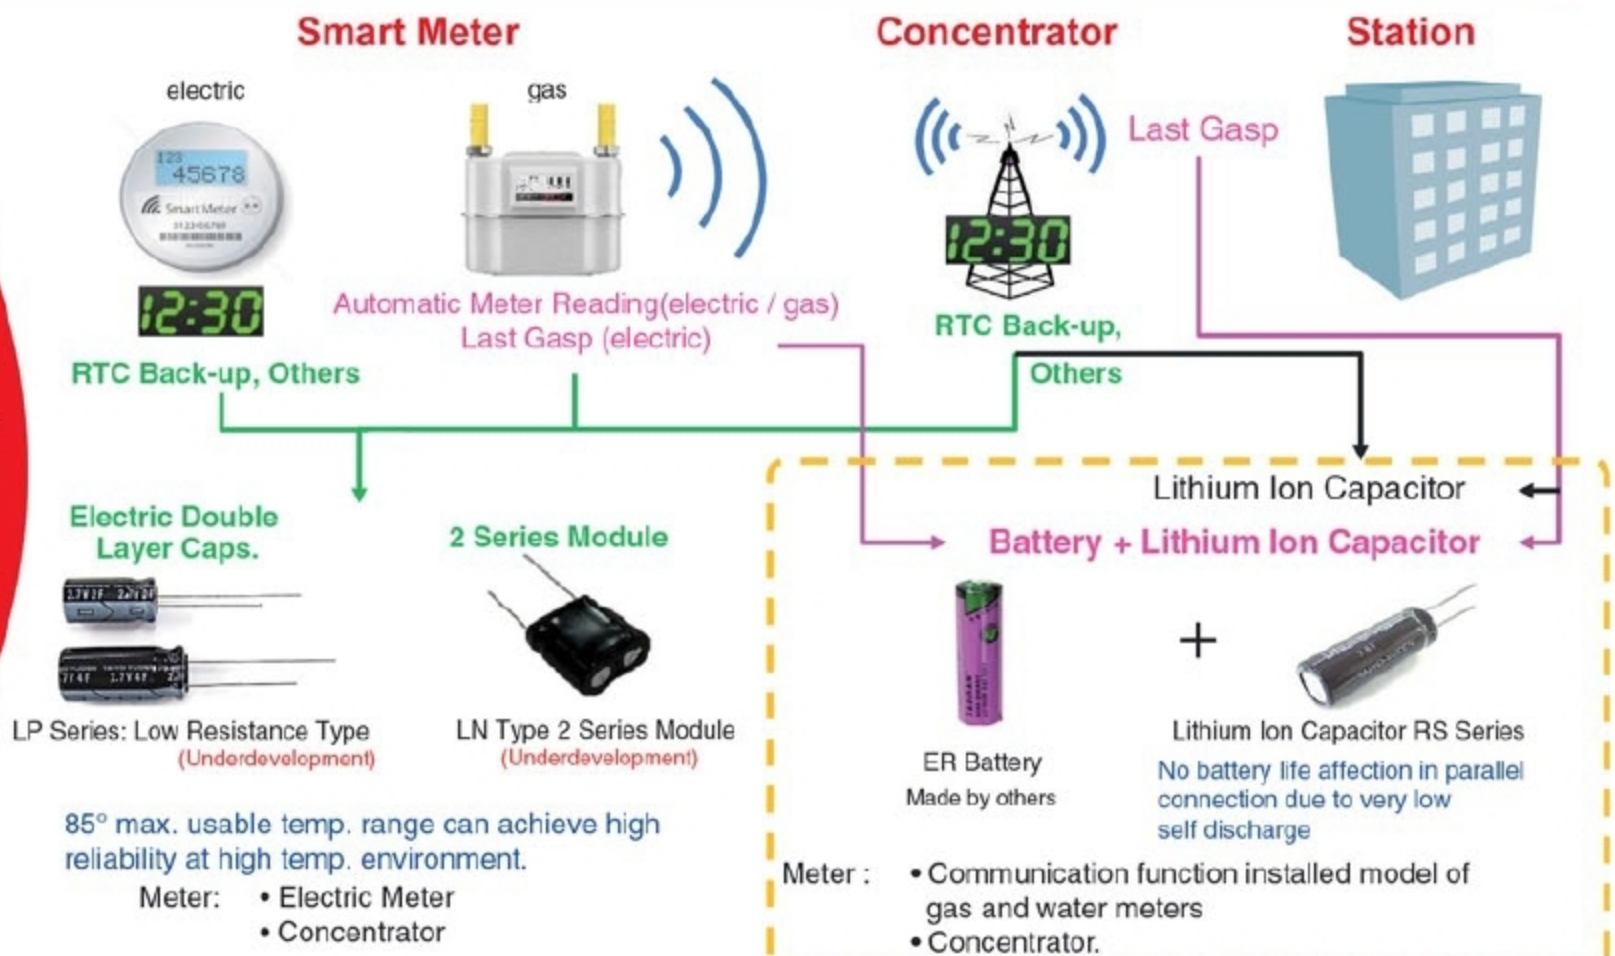

For detail, please visit: <http://www.ty-top.com>
For inquiries, please contact: indiamarketing@sty.yuden.co.jp

TAIYO YUDEN