



Features

Small size
Tight tolerance and Stability
RoHS compliant

General Specification

Frequency Tolerance at 25°C	10ppm to + 100ppm
Frequency Stability	10ppm to + 100ppm
Operating Temperature	-10 °C to +60 °C *
Load Capacitance	6pF to 50pF or Series
Shunt Capacitance	< 7pF
Storage Temperature	-40°C to +85°C *
Drive Level	100uW *
Aging	± 5ppm first year max



CREC SMD3225

QUARTZ CRYSTAL RESONATOR

4 Pad Version 3.2 x 2.5 mm
Frequency Range : 25.000 MHz to 50.000 MHz

CREC SMD5032

QUARTZ CRYSTAL RESONATOR

4 Pad Version 5.0 x 3.2 mm
Frequency Range : 12.000 MHz to 40.000 MHz




CREC SMD7050

QUARTZ CRYSTAL RESONATOR

4 Pad Version 7.0 x 5.0 mm
Frequency Range : 0.000 MHz to 100.000 MHz

Hi-Link

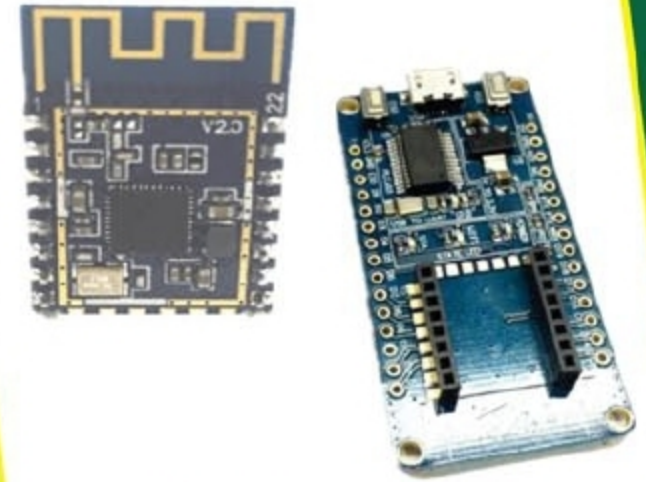

HLK-M50 Wireless Module

Integrates MCU Smart Home
Low cost wireless module

HLK- M50/M80 - SUIT – V1.2 is compatible with
NodeMCU ESP8266 LUA WiFi Internet Module
ESP-12E Development Board

WLAN Features:

1. Single-chip integrated MAC/PHY/Radio, Integrated PA, LNA
2. Supports 2.4GHz IEEE 802.11b/g/n. 20/40MHz bandwidth, maximum 150Mbps
3. Support WPA, WPA2, WEP, TKIP, CCMP
4. Support STA, softAP, P2P, STA+softAp, STA+P2P, Support A-MPDU, A-MSDU, HT-BA
5. Lightweight TCP / IP protocol stack

MCU Features:

1. Integrated ARM-CM4 MCU, the maximum clock frequency of 160MHz
2. Integrated MPU and mbed uvisor, Support external psram interface
3. Built-in 8Mbit SPI flash, Function pin position programmable
4. Integrated UART×2/I2S×2/I2C×1/PWM×8/SPI×4/SDMMC×1/USB2.0×1, 2 channel ADC
5. Integrated watchdog and low-power timer, Operating system using mbedOS5.1



Rajguru Electronics
www.rajguruelectronics.com

Head Off : 259, Shanti Sadan, 3rd Floor, Room No. 23,
Lamination Road, Mumbai 400 007

Branch Off: 3F, Manek Chambers,
3rd Floor Lamington Road, Above
Vasant Bhuvan, Mumbai 400 004.

Tel.: 23822040/40168411

Mob.: +91-7400168411

Email: sales@rajguruelectronics.com