

left panel. File formats supported by Slic3r are StereoLithography files (STL), Wavefront OBJ and Additive Manufacturing Format (AMF).

On the right panel, actionable buttons can help you reconfigure the digital object to get the best printed output. Rotate and 45 Degree help

rotate the digital model around selected axes. Scale helps resize the model as desired. If the model contains multiple portions, Split helps separate an object into multiple parts for ease of configuration. More and Less, respectively, increase or decrease the number of copies of the selected file to be printed. The tabs below the list allow you to modify the list itself. Then, there are buttons to add new files, delete listed files, auto-arrange files to get optimal print results, export G-codes from files or collate all listed files into a single STL.

Print Settings tab contains a large number of fields that may need to be updated in accordance with the desired print quality. You can set up print options by filling in the desired print options such as layer height, perimeter, fill density, fill pattern, pattern spacing, speed of print, brim width, extruder clearance and so on. Expert Mode allows you to make advanced changes for more intricate printing.

Filament Settings is required when a new filament is introduced for the printer. Changeable fields include filament diameter, extrusion multiplier, temperature of extruder and of the bed in first and other layers.

Printer Settings are used for synchronising the printer with the system. You can set the bed size, configure the printer centre, insert Z axis offset value, select firmware for G-code flavour, set nozzle diameter for the extruder and set up retraction values. For a particular printer being used, these parameters do not need to be changed often.

Features in the latest version

The latest version of Slic3r comes with a host of features and improvements.

- It supports interconversion between file formats like STL, OBJ, AMF, 3MF and POV.
- It has an auto-repair feature for

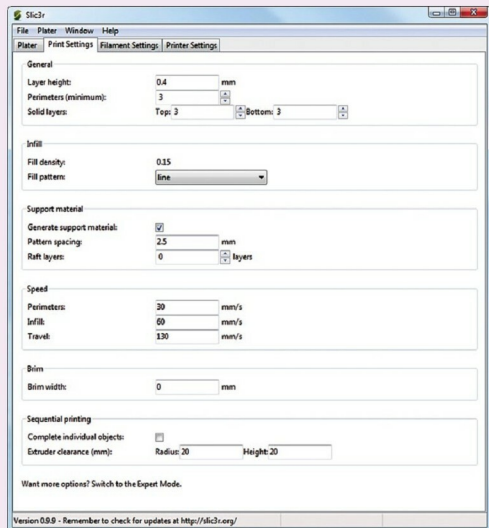


Fig. 3: Print Settings (Credit: slic3r.org)

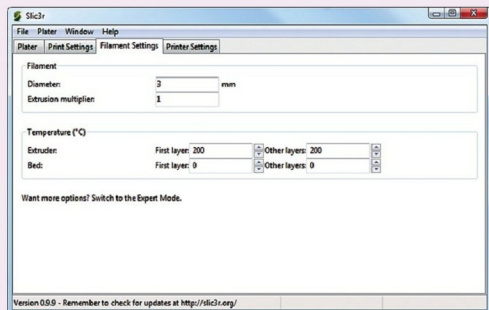


Fig. 4: Filament Settings (Credit: slic3r.org)