

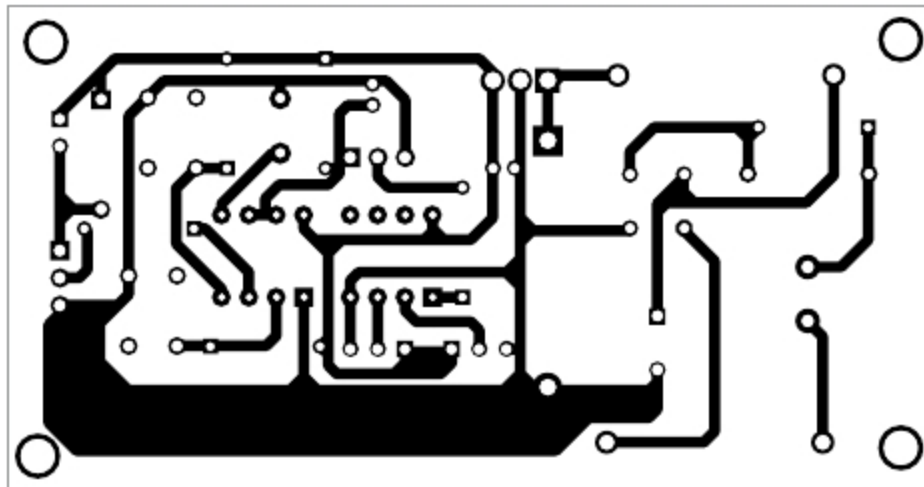


Fig. 2: Actual-size PCB layout of washbasin mirror light controller

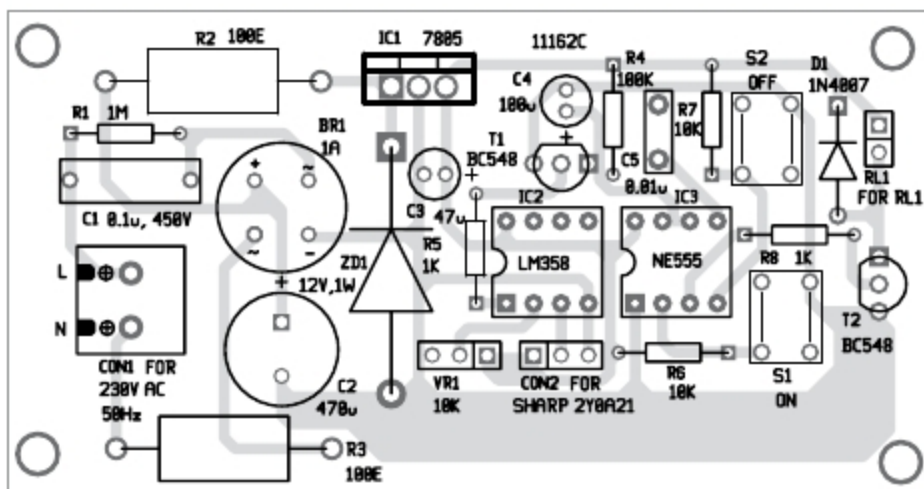


Fig. 3: Components layout for the PCB

When the sensor detects the absence of a person in front of the mirror, the circuit automatically turns it off after eleven seconds. This saves energy and prevents unnecessary power consumption.

Construction and testing

An actual-size PCB layout for the washbasin mirror light controller is shown in Fig. 2 and its components layout in Fig. 3. After assembling the circuit on the PCB, connect

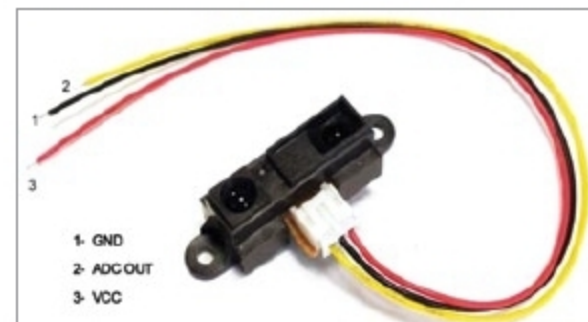


Fig. 4: Sharp 2Y0A21 sensor

230V AC, 50Hz across CON1. Connect RL1 to the PCB and bulb B1 across CON3. Mount S1, S2 and the Sharp 2Y0A21 sensor (Fig. 4) on the front panel of the cabinet.

For testing the circuit, stand in front of the sensor and press S1 to turn the bulb on. To turn it off, either press S2 to immediately turn it off, or move away from the sensor and the bulb will automatically turn off after eleven seconds. **EFY**



Riju Thazhathu Veetil is
R&D engineer at Technonics
R&D Lab, Malappuram, Kerala

Advanced EV Power & Battery Testing

Chroma
GROUP



Battery Cell/Pack ATS

Power Electronics ATS



Read more



Quantel Technologies
India Private Limited
T +91-80-4094-1520 (Bangalore)
T +91-22-4229-1002 (Mumbai)
T +91-11-4132-5052 (New Delhi)
www.quantel-global.com
sales@quantel-global.com



Distributor Wanted! Join Us!



EVSE Charger ATS

Taiwan Headquarters
Chroma ATE Inc.
T +886-3-327-9999
www.chromaate.com
info@chromaate.com