


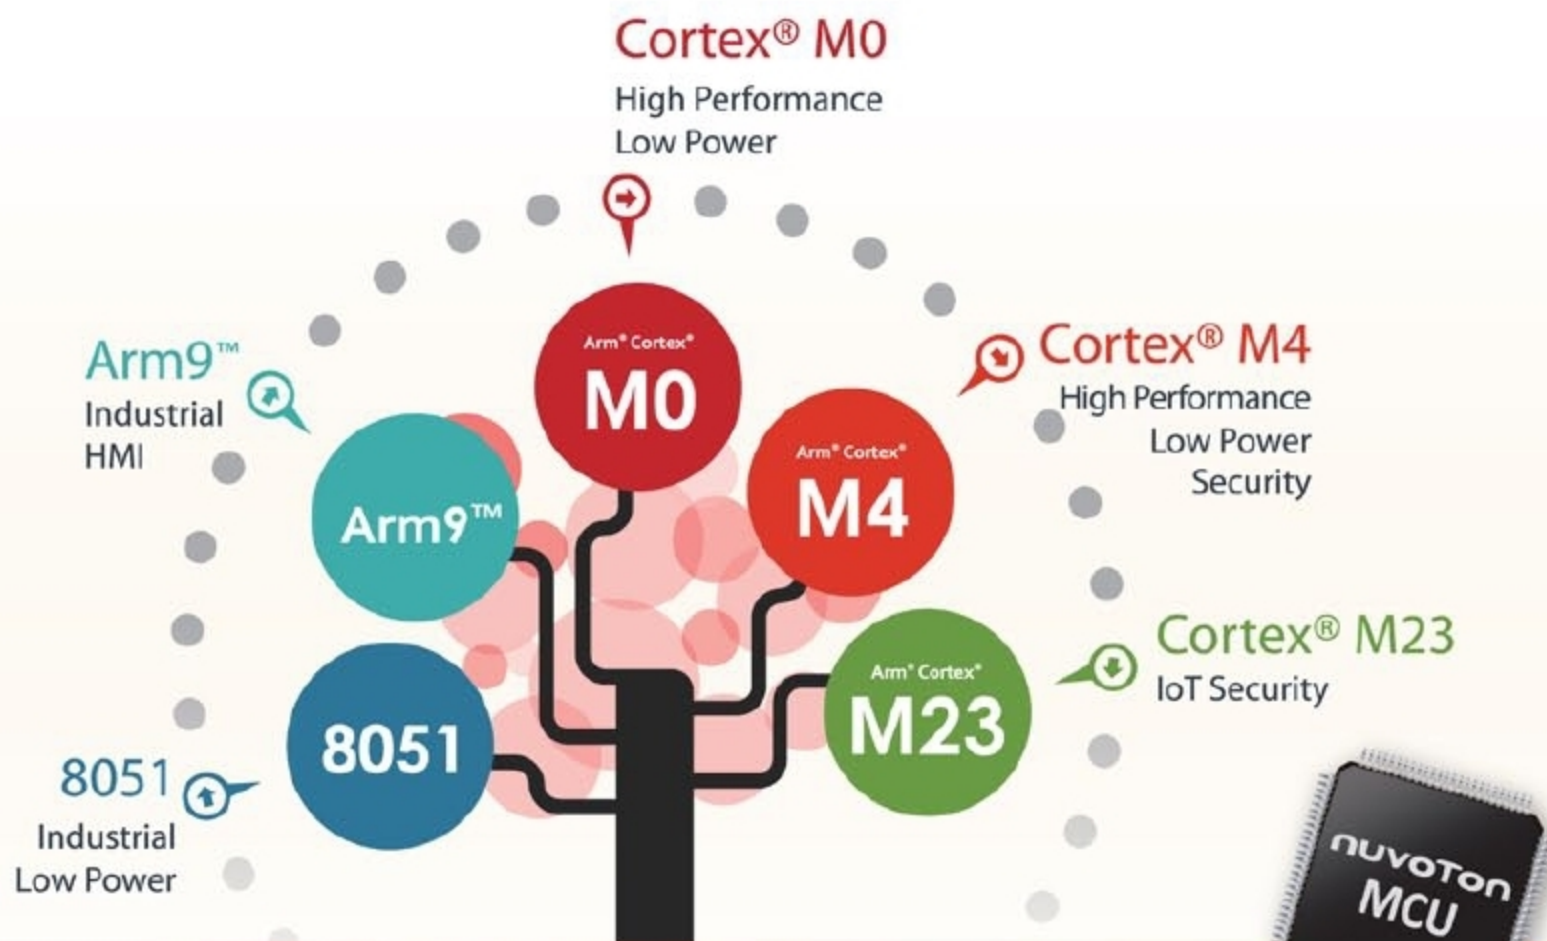

NuMicro® Low Power ML51 Series

1T 8051 Microcontroller

Extending battery life with robust and reliable features

- Up to 24 MHz CPU speed, with 16/32 KB Flash, 1/2 KB SRAM, and 128 B SPROM
- Normal run currents down to 80 μ A/MHz; Power down currents as low as 0.8 μ A
- PDMA supporting SPI, UART, and ISO-7816-3 peripherals to minimize CPU overhead
- 12-bit ADC with 4 level internal voltage reference and continuous scan mode
- 38.4 kHz LIRC with $\pm 1\%$ accuracy at 25°C which allows UART to transmit at 9600 baud rate
- Wide operating range: 1.8V to 5.5V; operating temperature: -40°C to 105°C
- Supporting MSOP10, TSSOP14, TSSOP20, QFN20, TSSOP28, QFN33, multiple packages

