


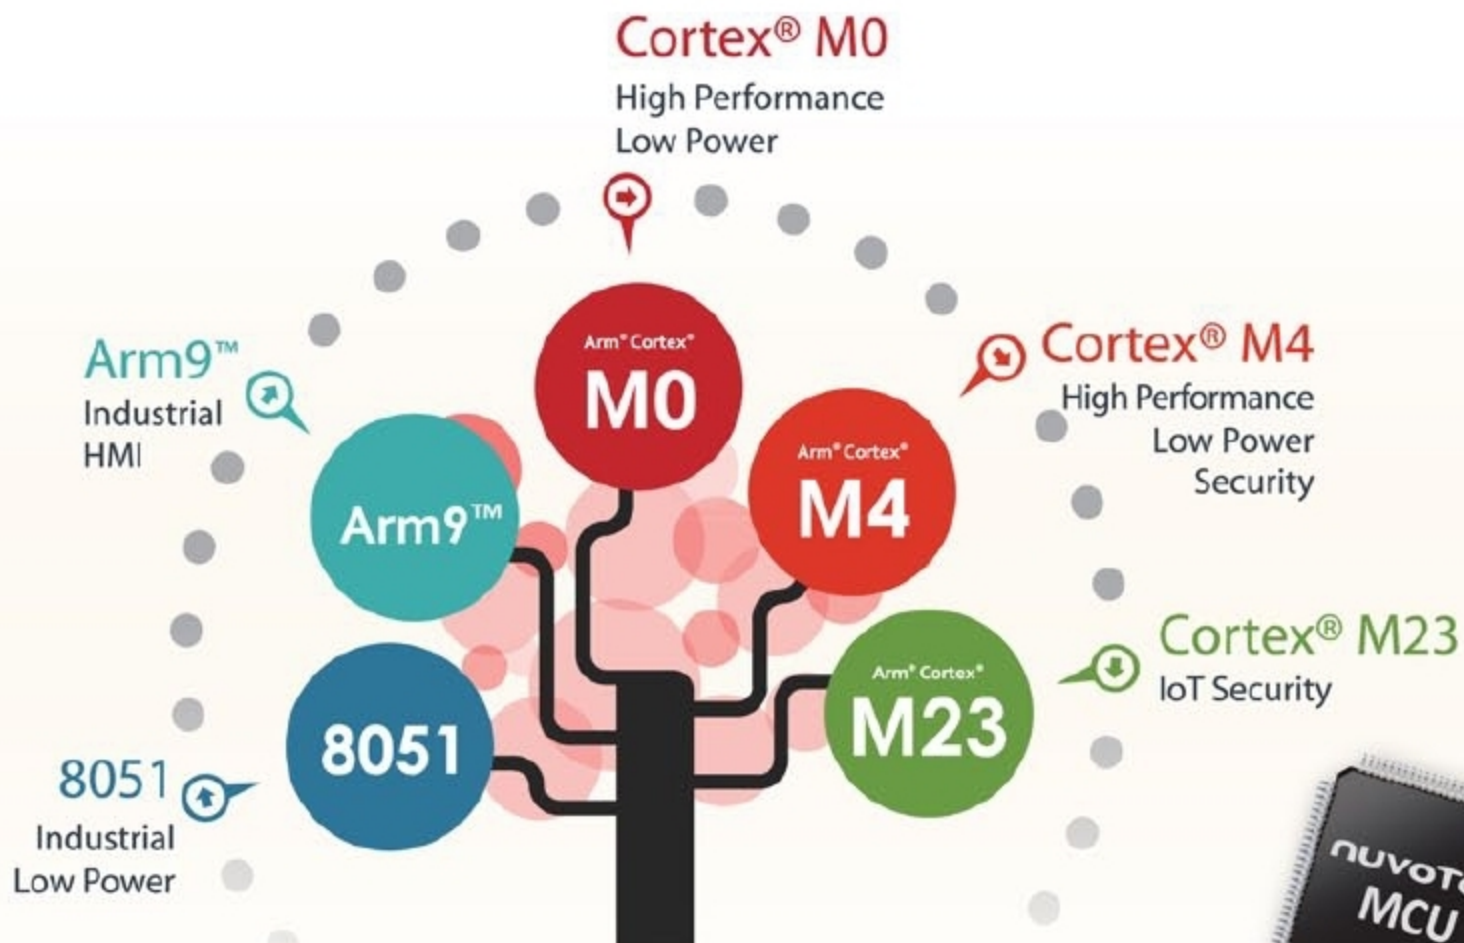

NuMicro® M483 Series

Low-power Arm® Cortex®-M4F CAN Bus Microcontroller

Ideal for AIS-140, GPS, and IRNSS Applications

- CPU speed up to 192 MHz, with DSP/ FPU
- 512/ 256 KB Flash and 160/ 128 KB SRAM
- Up to 3x CAN bus 2.0B, 2x LIN, 8x UART, 4x SPI, 3x I²C
- Up to 24-channel 12-bit 5MSPS ADC supporting simultaneous sampling
- Secure Boot with eXecute-Only-Memory. AES-256 and TRNG crypto accelerators

