

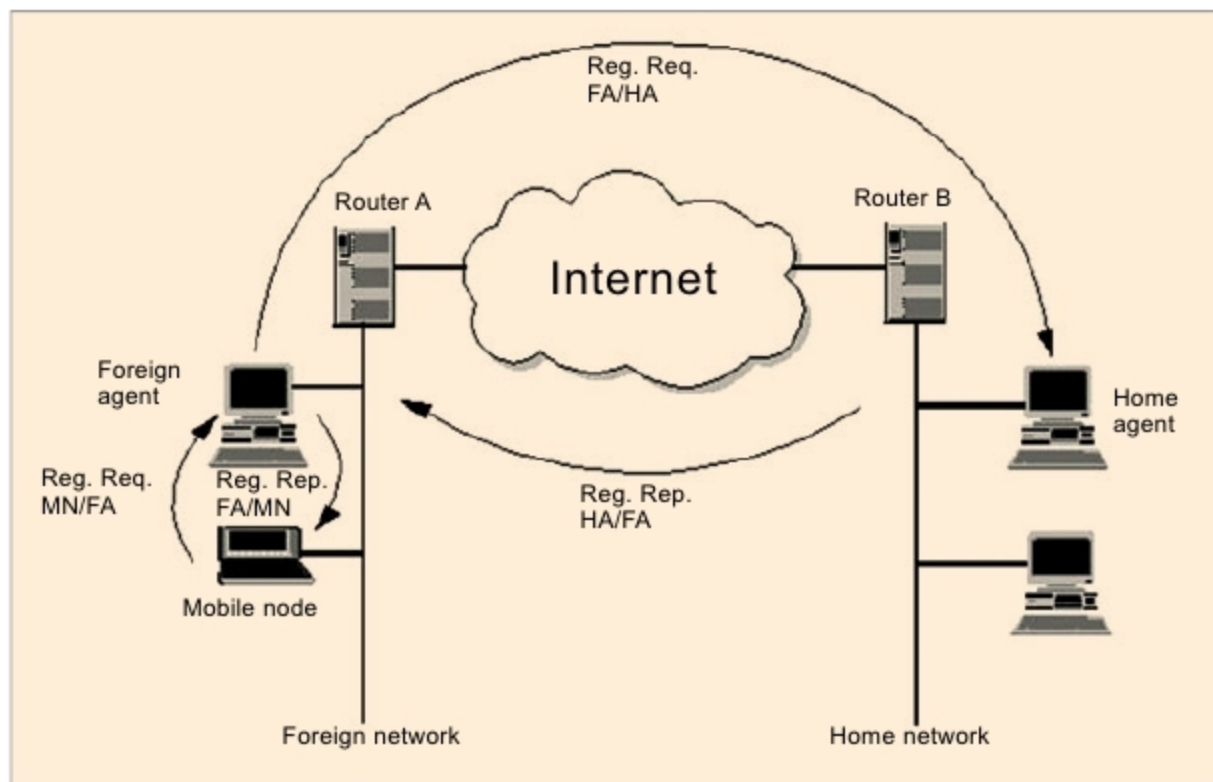


Fig. 5: Illustration of connection while mobile node (MN) is in roaming state

computer obtains a new IP address, Internet client software applications must be restarted.

Again, temporary addresses do not let a mobile user roam seamlessly from one IP subnet area to another. This creates a bottleneck, especially for wireless local area networks (LANs). As an example, a doctor with a wireless LAN connection needs to maintain IP connections throughout the hospital as he or she accesses patient records. This is where the need for a different solution by mobile IP arises.

Mobile IP enables mobile users to stay connected to the Internet regardless of their location and without changing their IP address. It allows them a fixed IP address for being connected to any IP subnet and immediately be reachable from the Internet.

Mobile IP is an extension of conventional IP and makes mobility transparent to higher layers of the Internet architecture. In fact, it is not just wireless connectivity, it is a mobile connectivity that supports seamless machine mobility with the support of Internet + DHCP.

Relational feature of DHCP, ICMP, ARP over basic TCP/UDP is portrayed in Fig. 4. Internet Engineering Task Force (IETF) defines mobile computer as a device used to carry data while users move from one network to another while maintaining their permanent IP address.

Request for Comments (RFC)

defines it as, "Mobile IP is an enhancement of the Internet Protocol that adds mechanisms for forwarding Internet traffic to mobile devices when they are connecting through other than their home network." Mobile IP is also defined as an extension to the untethered office concept, allowing unfettered access to the Internet or corporate networks any time, from any location.

An IP address uniquely identifies physical attachment to the subnet of Internet connectivity. When a source and a destination communicate over the Internet, they generally employ TCP for an end-to-end logical connection. When this logical connection is created, a TCP port number is assigned at both source and destination ends so that these two hosts remain in connection. Every end-to-end TCP logical connection is uniquely identified by four values: source IP address, source TCP port, destination IP address and destination TCP port. These remain fixed and static for the duration of the connection.

The basic problem with mobile node (MN) is that it may move from network to network. Therefore the challenge in mobile IP is to manage MN's IP address while dynamically changing location so that MN can always communicate with its permanent IP address. The solution is made with the proposed working principle of mobile IP, illustrated in Fig. 5.

A node that roams and changes

INSULATION TESTERS

Analog

MC-900BA Series

Model	Range	Test Voltage DC
MC-901BA	0-20 M Ohms	100V
MC-903BA	0-100 M Ohms	500V
MC-904BA	0-500 M Ohms	500V
MC-941BA	0-1000 M Ohms	500V
MC-906BA	0-200 M Ohms	1000V
MC-907BA	0-500 M Ohms	1000V
MC-981BA	0-2000 M Ohms	1000V

Digital

DIT 99 Series

Model	Range	Test Voltage DC	Resolution
DIT 99A	0-20 M Ohms	100V	0.01 M Ohms
DIT 99B	0-200 M Ohms	250V	0.1 M Ohms
DIT 99C	0-200 M Ohms	500V	0.1 M Ohms
DIT 99D	0-200 M Ohms	1000V	0.1 M Ohms
DIT 99E	0-2000 M Ohms	1000V	1 M Ohms

5KV

DIT 954

Specification	Test Voltage	Range
Insulation Resistance	1000V / 2500V / 5000V	0.1MΩ to 200GΩ
AC Voltage Measurement	0-500V AC (50-60Hz)	-
Phase Sequence Test	100V-450V (Phase-Phase) 40-60Hz	-

Meco Meters Private Limited

Plot No. EL-60, MIDC Electronic Zone,
TTC Industrial Area, Mahape,
Navi Mumbai - 400710 (INDIA)

Tel : 0091-22-2767 3300 (Board), 2767 3311-16 (Sales)

Fax : 0091-22-27673310

Email : sales@mecoinst.com Web : www.mecoinst.com

Connect With Us :