


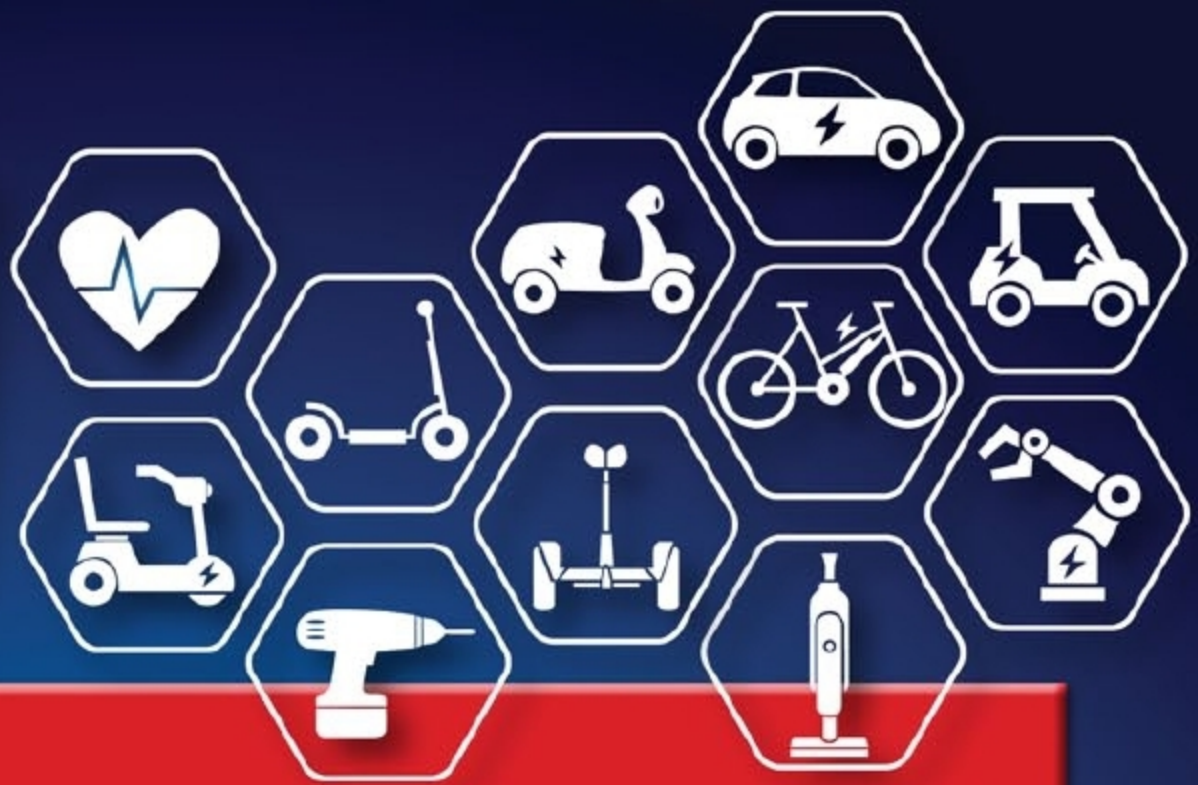

HIGH SPECS-vs-PRICE RATIO

DC 72Vin → 5Vout @ +115°C, 300mA

R-78HE Series: Suitable for all kinds of Battery Powered Devices (12/24/28/48/60V)

- Input DC voltage up to: 72V (continuous), 100V (100ms transient)
- Ambient operating temperature up to:
+105°C @full load & +115 °C @0.6W
- 5V/300mA regulated output with continuous short circuit protection
- High reliability, MTBF:
 - 15 million hours @+25°C
 - 1 million hours @+95°C
- Classic SIP3 3-pin Format
- Simple Class B filter

