



NEW PRODUCTS

COMPONENTS

MEMS pressure sensor

STMicroelectronics LPS22HH MEMS piezoelectric absolute pressure sensor is so accurate and stable that manufacturers can eliminate one-point calibration after soldering to increase throughput and efficiency. With a pressure noise equivalent to 5cm, LPS22HH enhances controls such as collision avoidance for drones or other unmanned vehicles. Its superior accuracy also enhances features of smartphones and sports watches, such as indoor navigation.

STMicroelectronics India
www.st.com




Chip resistors

ROHM has announced the availability of LTR50 series of wide-terminal, low-ohmic, high-power thick-film chip resistors (10mΩ - 910mΩ), which are ideal for current detection in a variety of applications, including inverters, AC and energy-efficient appliances. Key features include:

- Superior temperature coefficient of resistance ensures high-accuracy current detection
- Four times higher rated power than conventional products contributes to greater space savings

ROHM Semiconductor India Pvt Ltd
www.rohm.com

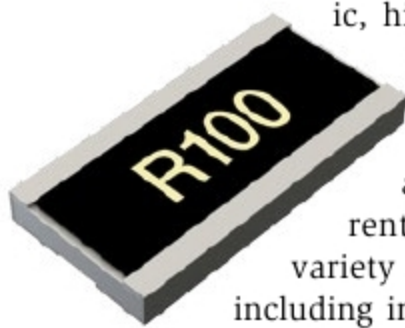

Chipset

MediaTek has launched Helio P90 system-on-chip (SoC), which features APU 2.0, its new-generation artificial intelligence (AI) architecture for a great

AI processing boost. With 1127 GMACs (2.25TOPs) performance, Helio P90 boasts flagship device-level AI power.

Helio P90's built-in processing unit—APU 2.0—can deliver a new level of AI experiences that are four times more powerful than Helio P70 and Helio P60 chipsets. It helps users perform intensive

AI tasks effortlessly with faster and more accurate results, while ensuring longer battery life.

MediaTek Inc.
www.mediatek.com



Data converters

Texas Instruments (TI) has introduced four tiny precision data converters, which are smallest in their respective class. The data converters enable designers to add more intelligence and functionality, while shrinking system board space. DAC80508 and DAC70508 are eight-channel precision digital-to-analogue converters (DACs) that provide true 16- and 14-bit resolution, respectively. ADS122C04 and ADS122U04 are 24-bit precision analogue-to-digital converters (ADCs) that feature a two-wire, I2C-compatible interface and a two-wire, UART-compatible interface, respectively.

Texas Instruments Inc.
www.ti.com



Seven-segment module

Some features of the seven-segment module by Alfa Electronic Components are:

- Single-sided PCB instead of PTH PCB, thereby saving PCB cost

- Only 17 pins for soldering, hence, reduction in number of soldering points and faster production
- No need for aligning PV display with SV, thereby faster production
- Six LEDs to indicate different types of processes

Alfa Electronic Components
www.alfaopto.com



Buck-boost battery charger

Renesas has unveiled ISL9241, which is industry's first USB-C buck-boost battery charger to support both narrow voltage direct charging (NVDC) and hybrid power buck-boost (HPBB) charging for notebooks, ultrabooks, tablets and power banks, using the reversible USB Type-C connector cable. The ISL9241 combo NVDC and HPBB battery charger gives mobile device OEMs a high level of flexibility along with optimised system performance and maximum efficiency for thinner form factors and longer battery life.

Renesas Electronics Corp.
www.renesas.com



Hall-effect switch ICs

Allegro MicroSystems has released a family of micropower Hall-effect switch ICs—APS11700 and APS11760—designed specifically for battery-powered applications in harsh industrial and automotive environments. Automatic power management enables average supply current as low as 6μA, while operating directly from a

