


USB I/O controller

IO-Warrior28 is the newest addition to the popular USB I/O controller family by Code Mercenaries. With nineteen generic digital I/O pins, it is currently

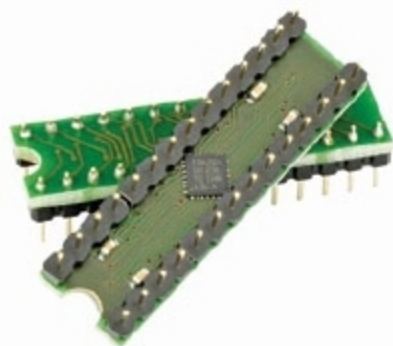

the smallest in the IO-Warrior family. But small is only the package, the functions are powerful. Like all IO-Warrior chips, it supports HD44780 compatible display modules. In addition, it has a fast IIC master with data rates from 10kHz up to 1MHz. A four-channel A/D converter with 12 bits allows true voltage measurement thanks to an internal bandgap reference with $\pm 10\text{mV}$ accuracy. Up to 30kHz sample rate is possible.

Code Mercenaries
<https://codemercs.com>

Shield clip

Covering a surface area of 2.3mm x 1.2mm and with 2mm height, Harwin's S0911-46R shield can clip is the smallest surface mount EMI/RFI shield clip currently available in the market. Consequently, it is much better at addressing the demands being set by the latest generation of high-density electronic systems. This ultra-compact component, which has a beryllium-copper construction with tin-over-nickel plating, enables shielding cans with sides of only 1mm in length to be fitted in order so that minimal board real estate is taken up. Designed for 0.2mm can thicknesses, it is suitable for cans that have complex shapes.

Harwin
www.harwin.com

TVS diode arrays

Littelfuse has introduced two series of bidirectional TVS Diode Arrays (SPA diodes) designed to protect ultra-high-speed consumer electronics interfaces from damaging electrostatic discharge

in applications where PCB layout is especially challenging. The SP3208-01UTG, the first TVS diode array in the SP3208 series, is mechanically optimised to deliver consistently ultra-low capacitance (nominally 0.08pF).

Littelfuse Inc.
www.littelfuse.com

Isolated DC/DC converters

R2SX is an open-frame 2W SMD isolated DC/DC converter with either 3kV DC/one-minute isolation (/H version) or 1kV DC/one-minute isolation options.



The modules are available with 5V or 24V inputs, offer a single unregulated 3.3V, 5V, 15V or 24V output, and can reach up to 86 per cent efficiency. There is no minimum load requirement and efficiency stays high over a wide twenty to a hundred per cent load range. Operating temperature is from -40°C up to $+75^{\circ}\text{C}$ at full load, and up to $+100^{\circ}\text{C}$ with derating.

RECOM Asia Pte Ltd
www.recom-power.com

Bus converter module

The 800V BCM4414 is a 1.6kW, isolated, 1/16 fixed-ratio, bus converter module



(BCM), which can operate from a 500V to 800V input voltage, to deliver SELV output voltages with 97 per cent peak efficiency. The module complements the existing Vicor 700V BCM4414 to create a family of products with reinforced isolation (4,242V DC) and bidirectional voltage conversion capability.

Vicor Corp.
www.vicorpower.com

TEST & MEASUREMENT

Integrated network analysers

High-speed digital, wireless, aerospace and defense, and automotive companies need integrated active and passive com-



ponents for devices such as cellphones, satellite communications and 5G base stations, to increase performance and reduce size of end products. These highly-integrated devices require highly-integrated test solutions that address radio frequency (RF) test challenges while providing advanced functionality and performance. Keysight's new E5080B, P50xxA series and M980xA series network analysers combine built-in pulse generators and modulators, spectrum analysis and time domain analysis in a single instrument to save time by fully characterising modern devices without the need for additional test hardware.

Keysight Technologies Inc.
www.keysight.com

Inspection system

With the S3088 DT, Viscom has expanded its diverse range of inspection systems for the electronics industry to include an especially flexible, compact machine for dual-track operation. The S3088 DT is configured as standard with a dual-track system for use in automatic optical inspection (3D AOI).

Viscom Machine Vision (Trading) Shanghai Co. Ltd
www.viscom.de



WLAN measurement solution

Anritsu has announced its wireless connectivity test set MT8862A WLAN measurement solution, which has world-first support for IEEE802.11ac OTA (over the air) tests. MT8862A is