




NuMicro® MS51 Series 1T 8051 Microcontroller

MS51 gives you painless and easy migration from N76E003!


- CPU speed up to 24 MHz, with 16 KB Flash, 1 KB SRAM, and 128 B SPROM
- 12-bit 8 channels of ADC; continuous conversion mode supported
- Less than 6 μ A power down current consumption
- Strong IO sink current to reduce external pull-up resistor
- Industrial grade operating environment: 2.4V to 5.5V, -40°C to 105°C
- Pin to Pin/ code to code compatible with N76E003

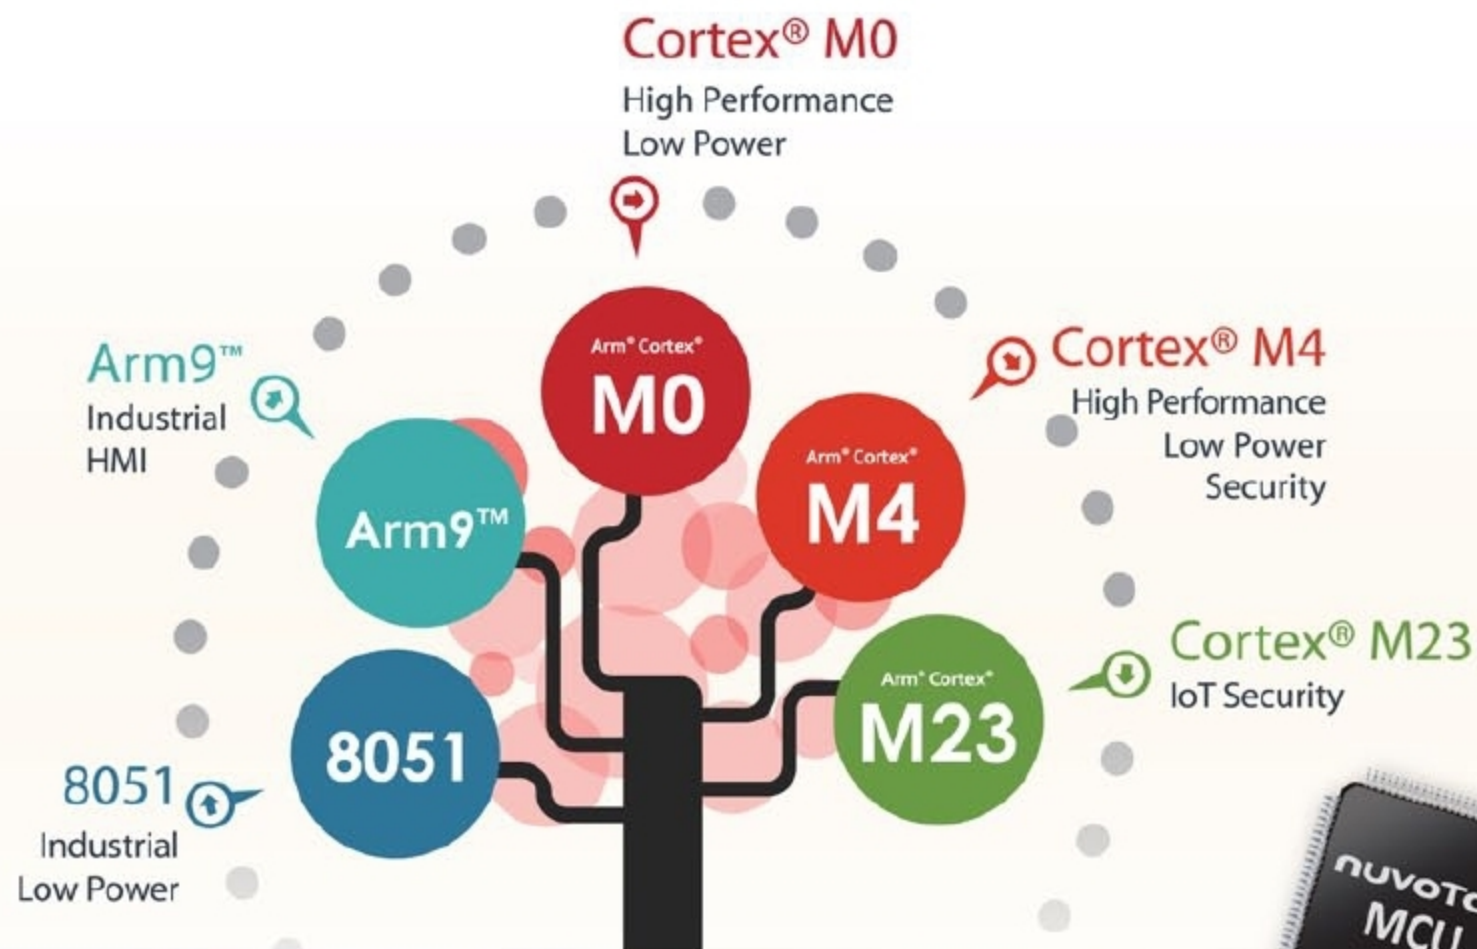

BMS
(Battery Management System)



BLDC (Brushless DC)
Fan Control



Air Con /
Home Appliance



Solar Charge
Controller

Nuvoton Technology India Pvt Ltd.

SalesSupport@nuvoton.com
www.nuvoton.com
+91-80-4188 0600

Authorized Distribution Partner

Millennium Semiconductors
info@millenniumsemi.com
www.millenniumsemi.com
+91-9922295311
+91-20-2748 4800



Digital PSG



Nuvoton Direct



Nuvoton FB