




## NuMicro® MS51 Series 1T 8051 Microcontroller

### MS51 gives you painless and easy migration from N76E003!

- CPU speed up to 24 MHz, with 16 KB Flash, 1 KB SRAM, and 128 B SPROM
- 12-bit 8 channels of ADC; continuous conversion mode supported
- Less than 6  $\mu$ A power down current consumption
- Strong IO sink current to reduce external pull-up resistor
- Industrial grade operating environment: 2.4V to 5.5V, -40°C to 105°C
- Pin to Pin/ code to code compatible with N76E003

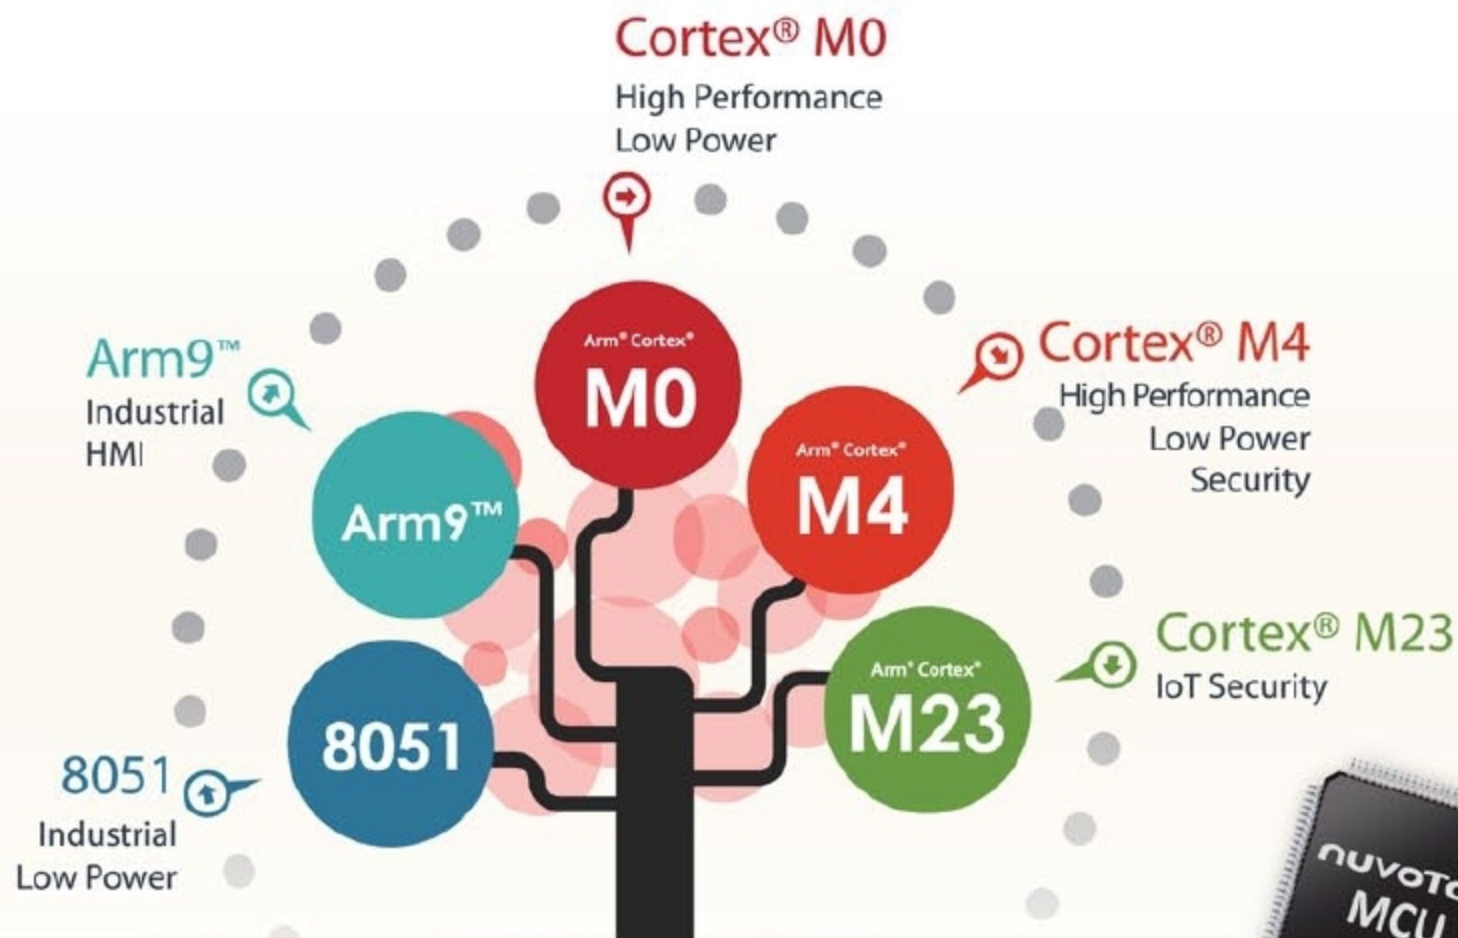


MS51 Video Intro



**BMS**  
(Battery Management System)



**BLDC (Brushless DC)**  
**Fan Control**



**Air Con /**  
**Home Appliance**



**Solar Charge**  
**Controller**

#### Nuvoton Technology India Pvt Ltd.

SalesSupport@nuvoton.com  
www.nuvoton.com  
+91-80-4188 0600

#### Authorized Distribution Partner

Millennium Semiconductors  
info@millenniumsemi.com  
www.millenniumsemi.com  
+91-9922295311  
+91-20-2748 4800



Nuvoton YouTube



Digital PSG



Nuvoton Direct



Nuvoton FB