


Original, innovative circuit ideas are invited

from designers and
experimenters
for publication in EFY magazine



Honorarium (minimum ₹1,000)
will be paid to the contributors soon
after publication of their articles.

Complete details may be sent to the
Editor, Electronics For You,
D-87/1, Okhla Industrial Area Phase 1,
New Delhi 110020
or emailed to editsec@efy.in

For editorial guidelines, visit
http://efymag.com/Guidelines_for_EFY_authors.doc

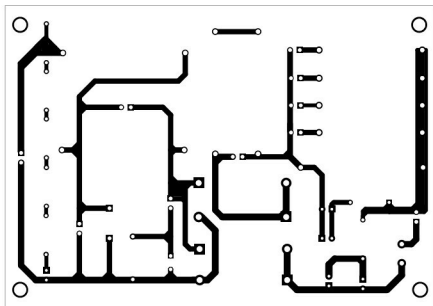


Fig. 2: Actual-size PCB pattern for the low-cost and versatile battery charger

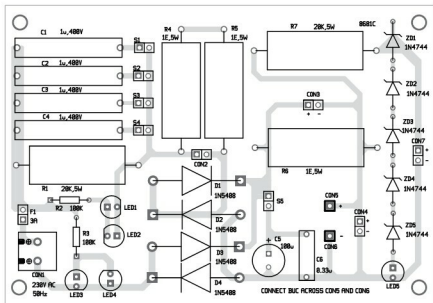


Fig. 3: Component layout of the PCB

and its component layout in Fig. 3. After assembling the circuit on the PCB, enclose it in a suitable box.

The circuit is simple and, hence, does not need any adjustments after proper wiring has been done. The most important thing is to select C1 through C4 according to the targeted batteries. You can increase the resistors R4, R5 and R6 according to the needs.

The number of switches (S1 through S4) and associated capacitors

(C1 through C4) can be increased or decreased according to specific needs, making the solution very flexible. Fix all switches and LEDs on the front side of the box. **EFY**



Petre Tzvetz Petrov was a researcher and assistant professor in Technical University of Sofia (Bulgaria), and expert-lecturer in OFFPPT(Casablanca), Kingdom of Morocco. Now he is working as an electronics engineer in the private sector in Bulgaria