


ST25TA series NFC/RFID tags



NFC/RFID tags with ISO/IEC 14443 Type A RF interface, NDEF memory and 128-bit password protection

ST's ST25TA ICs provide the NFC Forum Type 4 Tag RF interface and built-in NDEF (NFC Data Exchange Format) message support. The embedded EEPROM memory density spans from 512 bits to 64 Kbits, covering a wide spectrum of applications including content-rich virtual business cards and smart signs. The ST25TA series delivers state-of-the-art RF performance and features a user-programmable digital CMOS (or Open Drain) output that eliminates the need for an external component to trigger the host wake-up.

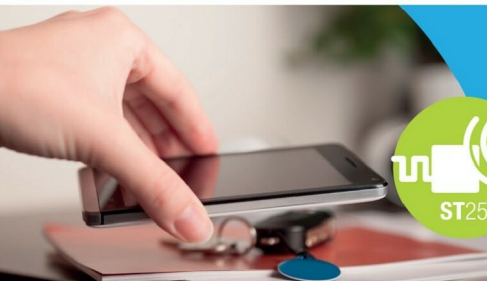

KEY FEATURES

- ISO/IEC 14443 Type A
- NFC Forum Type 4 Tag
- 13.56 MHz carrier frequency
- 512-bit, 2-Kbit, 16-Kbit and 64-Kbit densities
- 56-bit unique identifier
- 128-bit password protection
- Optional 20-bit counter
- Optional RF status digital output
- 5- and 8-lead UDFPN packages
- Bumped wafer die form packages
- 25 or 50pF tuning capacitance
- 200 years data retention
- 1 million write erase cycles

KEY BENEFITS

- Wide memory density options
- High-reliability EEPROM
- Built-in NDEF format support
- Strong password protection scheme
- Read or Write operations counter
- Flexible user-programmable GPO

KEY APPLICATIONS

- Smart posters
- NFC business cards
- Consumer electronics
- Wireless handover
- Gaming
- Industrial
- Traceability
- Wearable electronics
- Computer peripherals

STMicroelectronics Pvt Ltd

Plot No 1, Knowledge Park III,
Greater Noida 201308, Uttar Pradesh, India

Authorized distributors

• Arrow: Murali: +91-96866 79492 • Asia Lucky: Munish: +91-9717091771 • Avnet: Sravanthi: +91-99805 67572
• EDOM: Raghunatha. G: +91-9910075895 • Future: Pawan: +91-98452 22703 • Teck: Sumit: +91-98997 35127
• Tomen: Priti: +91-98197 94974 • WT: Ramkumar. N: +91-90080 88998 • Yosun: Anurag: +91-99106 45646

Send Enquiry to: nidhi-sehgal.kaul@st.com

www.st.com/nfc-rfid