

Fig. 4: (L) TPS334 package and (R) its pin drawing

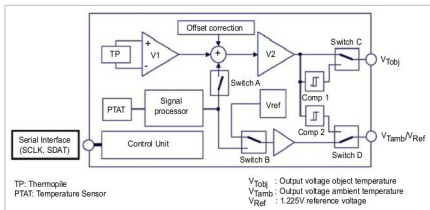


Fig. 5: Functional diagram of A2TPMI

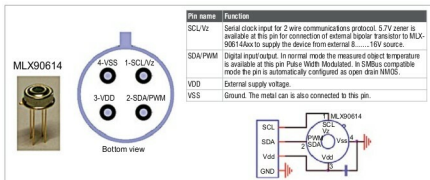


Fig. 6: Pin configuration of MLX90614

employs a chip of $0.7 \times 0.7\text{mm}^2$ absorber size, and a 30-kilo-ohm thermistor as the temperature reference component. Its round window opening is outfitted with a $5.5\mu\text{m}$ long-pass infrared filter. TPS334 is available in TO-5 type package.

A2TPMI thermopile. A2TPMI, another thermopile from Excelitas, is a versatile infrared thermopile sensor with an integrated configurable ASIC for signal processing and ambient temperature compensation.

This integrated infrared module senses the thermal radiation emitted by objects and converts it into an analogue voltage. Because of the internal digital signal processing and 8-bit resolution of the internal control registers, A2TPMI has improved accuracy for adjustment and improved performance. Its E²PROM technology allows unlimited change in the configuration. Due to integration of sensor and electronics in a compact TO-39 (6-pin) housing,

KEW 2117R



AC Digital Clamp Meter

- 1000A AC & 600V AC/DC Auto Ranging
- 0.01A Resolution
- Non Contact Voltage Function
- Carry Case Standard

Special Introductory Price
With Carry Case.

MRP ₹ 4500/-

(till stocks last)

033

001

Ω

DATA HOLD

AUTO POWER SAVE

IEC 61010-1
CATIV/300VTRUE
RMS

Kyoritsu KEW India Instruments Pvt. Ltd.

T: +91 98246 80404 E: info.efy@kew-india.co.in

W: www.kew-ltd.co.in

Visit us at:

ELECTRAMA

10th - 14th Mar 2018

Hall No. 3 | Stall No. H309

India Service Centre

write to: service@kew-india.co.in

Japan
QUALITYINDIA
CALCULATION
CENTER INDIA