

- Altera Stratix V GS D5
 - 172k ALMs, 2014 M20Ks, 1590 DSPs
- 8GB DDR3-1333
- 32MB Configuration flash



- PCIe Gen 3 x8
- 8 lanes to Mini-SAS
- SFF-8088 connectors
- Powered by PCIe slot



Fig. 18: Altera vs PCI

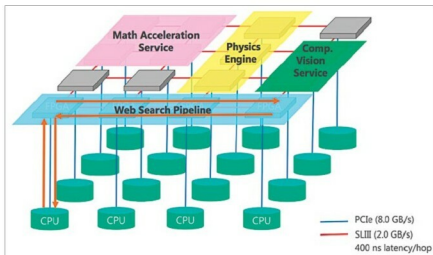


Fig. 19: Catapult uses a network of directly linked FPGAs

ring network that provides 20Gbps of peak bidirectional bandwidth at sub-microsecond latency. It allows FPGAs to share data directly without having to go back through the host servers. It can reprogram the Catapult fabric to adapt to new ranking algorithms without the time and cost of developing custom ASICs or the disruption of having to pull servers from production to install new ASICs—a primary consideration when operating cloud-scale data centres.

Microsoft is putting FPGAs on PCI Express networking cards in every new server deployed in its data centres. FPGAs handle compression, encryption, packet inspection and other rapidly changing tasks for data centre networks that in six years have jumped from

CATAPULT SERVER SPECIFICATION

Server	Specifications
Processor	2x Intel Xeon 12-core Sandy Bridge CPUs
Server memory	64GB DRAM
Disk	2xSSD4xHDD

Gbps to 50Gbps data rates. In comparison, GPUs are typically more power consuming and more difficult to program.

Power9 processors use Nvidia's NVLink to connect to chips like Pascal as well as IBM's own CAPI to link to FPGAs from Xilinx. Separately, ARM will use its Coherent Hub Interface to link to Xilinx FPGAs and other accelerators. The x86 giant is already showing packages that contain Xeon server and Altera FPGA

MECO®

SINCE 1962

POCKET SIZE DIGITAL MULTIMETERS



Pocket Size

- 3½ Digits 4000 Counts (101B+)
- 3½ Digits 6000 Counts (108B+ TRMS)
- Auto Ranging
- TRMS Measurement (108B+ TRMS)
- LCD with Backlight
- Upto 1000V DC
- Upto 750V AC
- Upto 10A DC / AC
- Upto 40MΩ (101B+)
- Upto 60MΩ (108B+ TRMS)
- 4.000nF ~ 4.000mF (101B+)
- 9.999nF ~ 9.999mF (108B+ TRMS)
- 99.99Hz ~ 20.00MHz
- 0.1% ~ 99.9% Duty Cycle
- RELA (101B+)
- -20°C ~ 1000°C (-4°F ~ 1832°F) (108B+ TRMS)
- K Type Thermocouple (Upto 260°C) (108B+ TRMS)
- Diode Test, Audible Continuity, Data Hold, Auto Power Off, & Low Battery Indicator

Meco Meters Private Limited

Plot No. EL-40, MIDC Electronic Zone,
TTC Industrial Area, Mahape,
Navi Mumbai - 400719 (INDIA)

Tel : 0091-22-27873300 (Board), 27873311-16 (Sales)

Fax : 0091-22-27873310, 27873330

Email : sales@mecoindia.com

Web : www.mecoindia.com