

Fig. 23: SuperVessel architecture

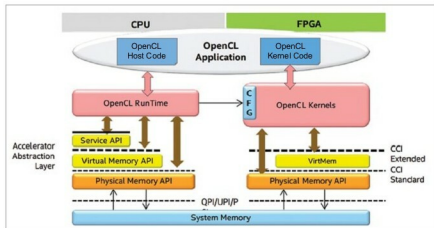


Fig. 24: OpenCL flow

factors, thereby lowering software barriers and improving the total cost-of-ownership of accelerated systems. CCIX will enable a new breed of high-density, flexible platforms for accelerating compute, storage and networking applications.

Intel has presented the future of Xeon processors with integrated FPGAs in a single-package socket compatible to the standard Xeon E5 processors. FPGAs provide users with a programmable, high-performance coherent acceleration capability to turbo-charge their critical algorithms. Algorithms can be changed as new workloads emerge and compute demands fluctuate. The new hardware combination could deliver over 20 times performance gains compared to more traditional ASIC-based solutions.

Reprogrammable FPGAs play a central role, enabling a more flexible infrastructure with software-defined allocation and prioritisation of virtualised computing, networking and storage resources. In effect, each FPGA acts as a node controller, for different algorithms to be accelerated across different FPGAs as shared resources in a data centre.

FPGAs allow users to tailor compute power to specific workloads or applications. Xilinx has added support for the proposed interface to its 16nm UltraScale+ product plans, combining its programmable logic with High Bandwidth Memory (HBM) and new accelerator interconnect technology for heterogeneous computing. Built on TSMC's chip-on-wafer-on-substrate process, Xilinx HBM-enabled FPGAs will



SINCE 1962

INFRARED THERMOMETERS



IRT1050P

- Temp. Range: -50°C ~ 1050°C
- Accuracy: $\pm 1.5^\circ\text{C}$
- Distance Spot Ratio: 50 : 1
- Emissivity: 0.10 ~ 1.00 (Adjustable)

IRT550T

- Temp. Range: -50°C ~ 550°C
- Accuracy: $\pm 1.5^\circ\text{C}$
- Distance Spot Ratio: 12 : 1
- Emissivity: 0.01~1.00 (Adjustable)

IRT380T

- Temp. Range: -50°C ~ 380°C
- Accuracy: $\pm 1.5^\circ\text{C}$
- Distance Spot Ratio: 12 : 1
- Emissivity: 0.01~1.00 (Adjustable)

Meco Meters Private Limited
 Plot No. EL-80, MIDC Electronic Zone,
 TTC Industrial Area, Mahape,
 Navi Mumbai - 400710 (INDIA)
 Tel : 091-22-27673300 (Board), 27673311-16 (Sales)
 Fax : 091-22-27673310, 27673330
 Email : sales@mecoind.com
 Web : www.mecoind.com