

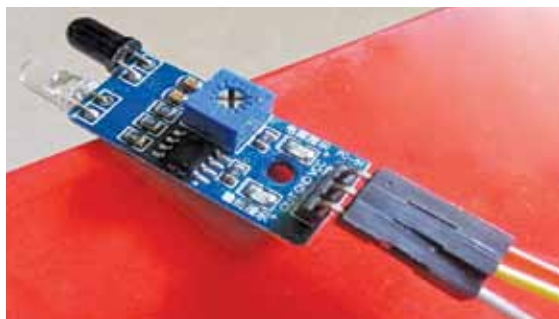


Fig. 3: IR sensor module

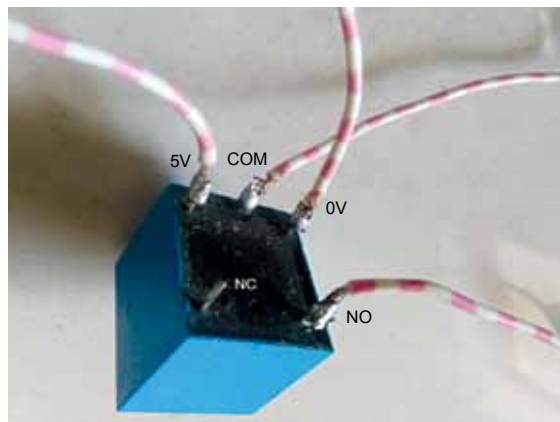


Fig. 4: Pin details of 5V sugar cube relay

```

sketch_dec15a | Arduino 1.8.5
File Edit Sketch Tools Help

sketch_dec15a $

int total=0;

void setup() {
  // put your setup code here, to run once:

  pinMode(7, INPUT);
  pinMode(8, INPUT);
  pinMode(9, OUTPUT);
  Serial.begin(9600);
}

void show()
{
  Serial.println(total);
  Serial.print("people in room.");
}
    
```

Fig. 5: Arduino code void setup ()


is energised, the COM pin touches the NO pin and the light bulb gets 230V AC mains supply. Pin details of a typical sugar cube relay are shown in Fig. 4.

Neutral (N) wire of the 230V AC source is connected to the light bulb through the relay. The live (L) wire is directly connected to the light bulb.

When the 'in' sensor (Module2) detects a



NEWLY EXTENDED
RANGE OF POWER SUPPLIES
FOR MEDICAL DEVICES



Electronic Components

TRANSFER MULTISORT ELEKTRONIK

USTRONNA 41, 93-350 ŁÓDŹ, POLAND
+48 42 645 54 44, EXPORT@TME.EU

www.tme.eu

facebook.com/TME.eu
youtube.com/TMElectronicComponent
instagram.com/tme.eu